




Up&Down S

Lavov wall fixture from the family Up&Down S with a power of 2x12.5W and a 15 degrees beam angle. Finished in grey colour. Dimensions 75x98x240mm.. With a total lumen output of 2x1083lm and a luminous efficiency of 86.64lm/W. CCT 3000K. Driver On-Off. Made in Die cast aluminium body and tempered glass front cover. .IP65. IK08

Dimensions

Product dimensions (mm) 75x98x240mm

Scheme

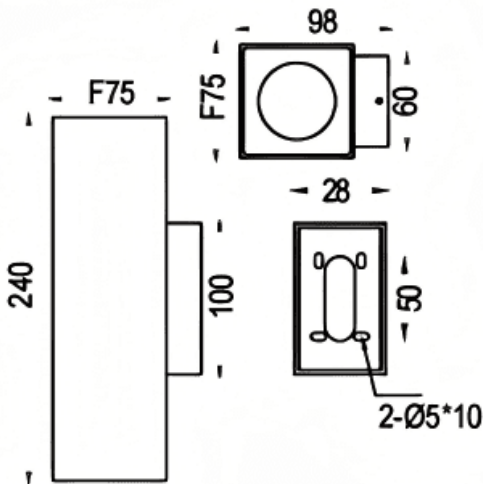

Photometry

Item code	86.OW15.3311.03				
Product type	Outdoor				
Category	Wall Light				
Family	Up&Down S				
Pictograms		50 60 Hz	 850°	CRI 80	SDCM 3
	CE	Driver INCL.	50000h L70B10	IP 65	

Product	
Real power (W)	2x12.5
Real luminous flux (Lm)	2x1083
Luminous efficiency (Lm/W)	86.64
Beam angle (°)	15
Life time (h)	50000h L70B10
IP	IP65
Electrical class insulation	Clas I
Colour	grey
Control gear included	Yes
Control gear	On-Off
Power Factor	>0,9
Flicker Free	Yes
Light source	LED
Type of LED	COB
Colour temperature (K)	3000
Colour consistency (SDCM)	<5SDCM
CRI	80
IK	IK08

