



**E-PANEL**


Lavov recessed fixture from the family E-PANEL with a power of 35W and an optics wit UGR19with a real lumen output of 4200 lm and an efficiency of 120lm/W. Driver DALI and CCT 3000K.

|                     |                          |
|---------------------|--------------------------|
| <b>Item code</b>    | <b>86.R001.1393.01</b>   |
| <b>Product type</b> | <b>Indoor</b>            |
| <b>Category</b>     | <b>Recessed Fixtures</b> |
| <b>Family</b>       | <b>E-PANEL</b>           |
| <b>Pictograms</b>   |                          |

**Dimensions**

**Product dimensions (mm)** **596x596x11**

**Scheme**

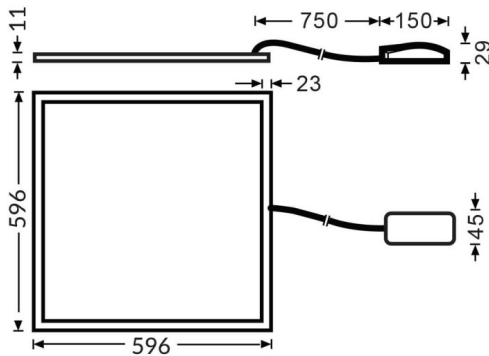

|                                   |                      |
|-----------------------------------|----------------------|
| <b>Product</b>                    |                      |
| <b>Real power (W)</b>             | <b>35</b>            |
| <b>Real luminous flux (Lm)</b>    | <b>4200</b>          |
| <b>Luminous efficiency (Lm/W)</b> | <b>120</b>           |
| <b>Beam angle (°)</b>             | <b>86.1</b>          |
| <b>Life time (h)</b>              | <b>50000h L80B10</b> |
| <b>IP</b>                         | <b>20 / 40</b>       |
| <b>Colour</b>                     | <b>White</b>         |
| <b>U. G. R</b>                    | <b>19</b>            |
| <b>Chip Brand</b>                 | <b>Seoul</b>         |
| <b>Control gear included</b>      | <b>Yes</b>           |
| <b>Control gear</b>               | <b>DALI</b>          |
| <b>Light source</b>               | <b>LED</b>           |
| <b>Type of LED</b>                | <b>SMD</b>           |
| <b>Colour temperature (K)</b>     | <b>3000</b>          |
| <b>Colour consistency (SDCM)</b>  | <b>SDCM3</b>         |
| <b>CRI</b>                        | <b>80</b>            |