






E-PANEL


Lavov recessed fixture from the family E-PANEL with a power of 35W and a beam angle of 120 degrees with a real lumen output of 3850 lm and an efficiency of 110lm/W. Driver DALI and CCT 4000K.

| | |
|--------------|--|
| Item code | 86.R001.2403.01 |
| Product type | Indoor |
| Category | Recessed Fixtures |
| Family | E-PANEL |
| Subfamily | E-PANEL |
| Pictograms | <div><div></div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div><div>CE</div><div>Driver INCL.</div><div>On Off</div><div></div><div>Emerg. 1h</div><div>IP 20</div><div>50000h L80B10</div></div> |

Dimensions

Product dimensions (mm) 1196x296x11

Scheme

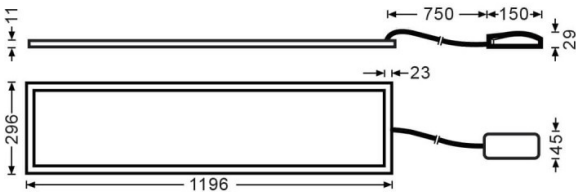

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 35 |
| Real luminous flux (Lm) | 3850 |
| Luminous efficiency (Lm/W) | 110 |
| Beam angle (°) | 120 |
| Life time (h) | 50000h L80B10 |
| IP | 20 / 40 |
| Colour | White |
| Chip Brand | Seoul |
| Control gear included | Yes |
| Control gear | DALI |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |