


#### Dimensions

Product dimensions (mm)  $\phi 220 \times 490$  Wire length: 1.2m

#### Scheme

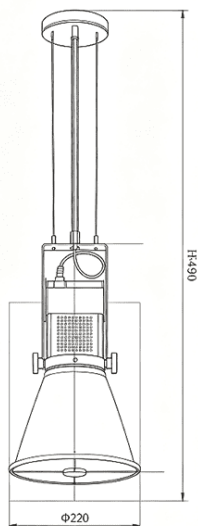

#### Forge COB

Lavov pendant from the family Forge COB with a power of 80W and a 120 degrees beam angle. Recessed installation. With a total lumen output of 10000lm and a luminous efficiency of 125lm/W. Driver dim. 2.4G & APP .Made in Die cast aluminium body and ABS reflector . Class II insulation. IP65 and IK . Mains voltage 175-245V . UGR . Finished in golden colour. CCT (2700-6500)K.CRI>95

|              |                                                                                                                                  |
|--------------|----------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.S007.1030.06                                                                                                                  |
| Product type | Indoor                                                                                                                           |
| Category     | Pendants                                                                                                                         |
| Family       | Forge                                                                                                                            |
| Subfamily    | Forge COB                                                                                                                        |
| Pictograms   | <div> <div>CRI 80</div> <div>CE</div> <div>Driver INCL.</div> <div>On Off</div> <div>1-10V</div> <div>50000h L70B10</div> </div> |

|                             |                 |
|-----------------------------|-----------------|
| Product                     |                 |
| Real power (W)              | 80              |
| Real luminous flux (Lm)     | 10000           |
| Luminous efficiency (Lm/W)  | 125             |
| Beam angle (°)              | 120             |
| IP                          | 65              |
| Electrical class insulation | Class II        |
| Electrical feeding          | 175-245V        |
| Colour                      | golden          |
| Control gear included       | yes             |
| Control gear                | dim. 2.4G & APP |
| Power Factor                | >0,6            |
| Flicker Free                | yes             |
| Light source                | LED             |
| Type of LED                 | COB             |
| Colour temperature (K)      | (2700-6500)     |
| CRI                         | >95             |