





Dimensions

Product dimensions (mm)	Ø169X139 mm
--------------------------------	--------------------

Scheme

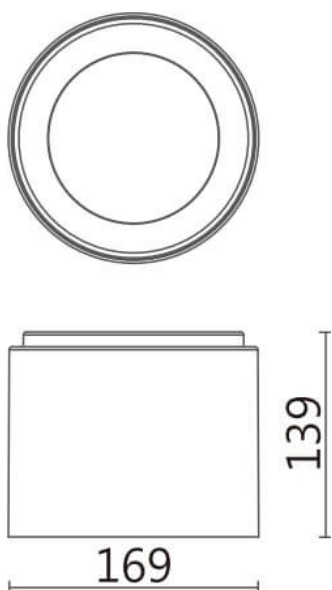

Photometry

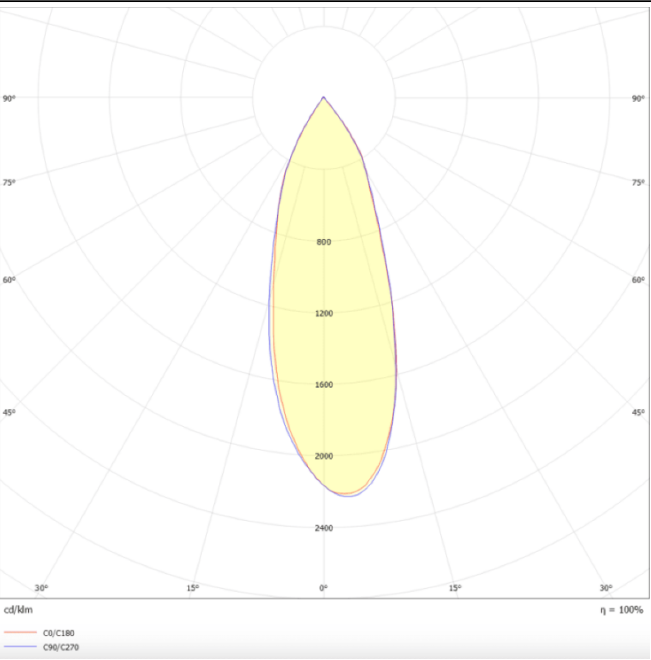

TUBULAR-S

Lavov surface mounted downlight from the family TUBULAR-S with a power of 25W and an optics 50 degrees beam angle. CCT 4000K. With a total lumen output of 2050lm and an efficacy of 82lm/W . Made in Die Cast Aluminum and finished in Black color. DALI driver.

Item code	86.SD01.2433.02
Product type	Indoor
Category	Surface Downlights
Family	TUBULAR-S
Pictograms	

Product	
Real power (W)	25
Real luminous flux (Lm)	2050
Luminous efficiency (Lm/W)	82
Beam angle (°)	50
Life time (h)	50000h L80B10
IP	IP20
Colour	Black
Chip Brand	Philip
Control gear included	Yes
Control gear	DALI
Average life time (h)	40
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80