


## TUBULAR-S

Lavov surface downlight from the family with a power of 20W and a beam angle of 60º. Finished in Black colour. Dimensions Ø95X152 mm .With a total lumen output of 1600lm and a luminous efficacy of 80lm/W. Made in Die Cast Aluminum. Driver ON-OFF. CCT 4000K.

| | |
|---|---|
| **Item code** | **86.SD01.2441.02** |
| **Product type** | **Indoor** |
| **Category** | **Surface Downlights** |
| **Family** | **TUBULAR-S** |
| **Pictograms** |  |


| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **Ø95X152 mm** |

**Scheme**

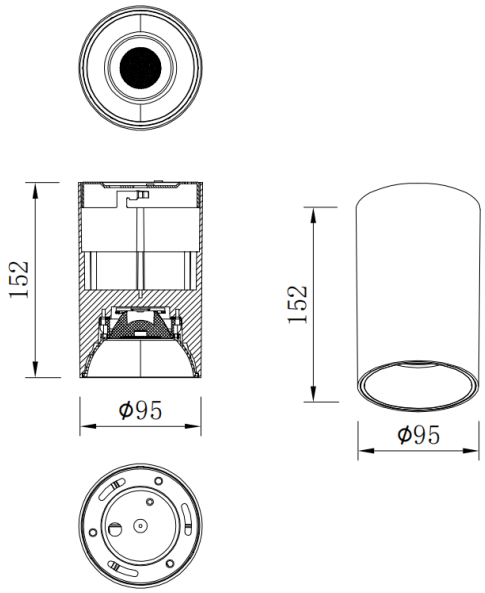


| **Product** | |
|---|---|
| **Real power (W)** | **20** |
| **Real luminous flux (Lm)** | **1600** |
| **Luminous efficiency (Lm/W)** | **80** |
| **Beam angle (º)** | **60** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **IP65** |
| **Colour** | **Black** |
| **Control gear included** | **Yes** |
| **Control gear** | **ON-OFF** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |

## Photometry

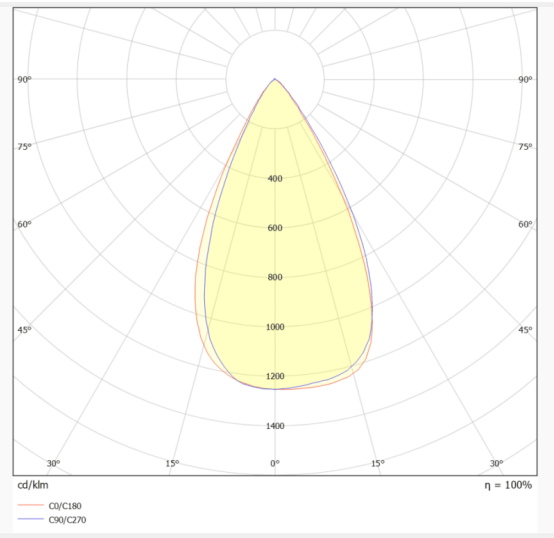
90°
75°
60°
45°
400
600
800
1000
1200
1400
30°
15°
0°
cd/klm
η = 100%
C0/C180
C90/C270