


TUBULAR-S

Lavov surface downlight from the family with a power of 30W and a beam angle of 40º. Finished in Silver colour. Dimensions Ø115X152 mm .With a total lumen output of 2400lm and a luminous efficacy of 80lm/W. Made in Die Cast Aluminum. Driver ON-OFF. CCT 4000K.

Item code	**86.SD01.3431.03**
Product type	**Indoor**
Category	**Surface Downlights**
Family	**TUBULAR-S**
Pictograms	


Dimensions	
Product dimensions (mm)	**Ø115X152 mm**

Scheme

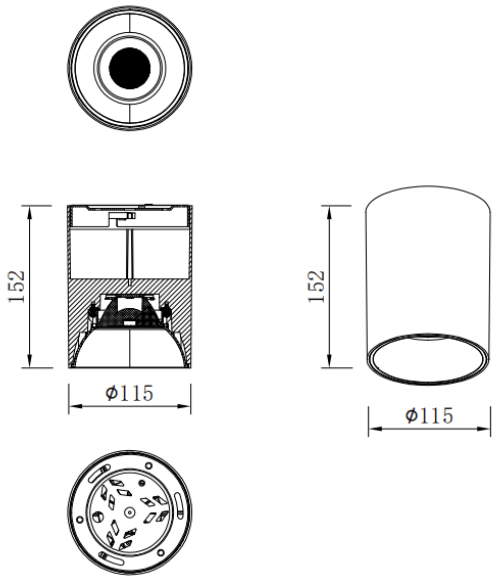

Product	
Real power (W)	**30**
Real luminous flux (Lm)	**2400**
Luminous efficiency (Lm/W)	**80**
Beam angle (º)	**40**
Life time (h)	**50000h L80B10**
IP	**IP65**
Colour	**Silver**
Control gear included	**Yes**
Control gear	**ON-OFF**
Light source	**LED**
Type of LED	**COB**
Colour temperature (K)	**4000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**

Photometry

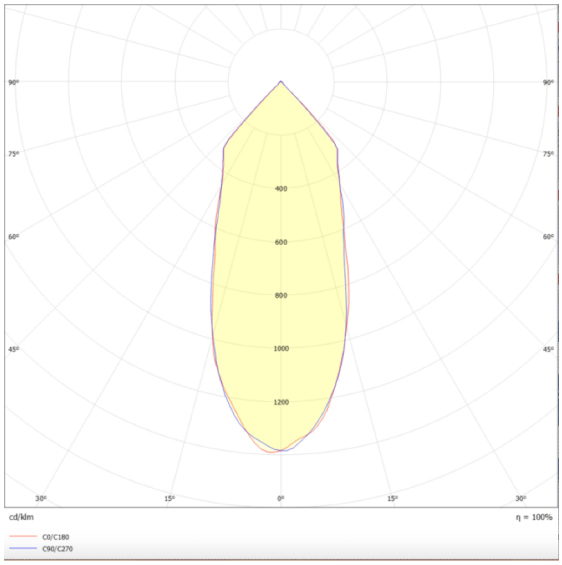
90°
90°
75°
75°
60°
60°
45°
45°
400
600
800
1000
1200
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270