




Dimensions

Product dimensions (mm) Ø200X139 mm

Scheme









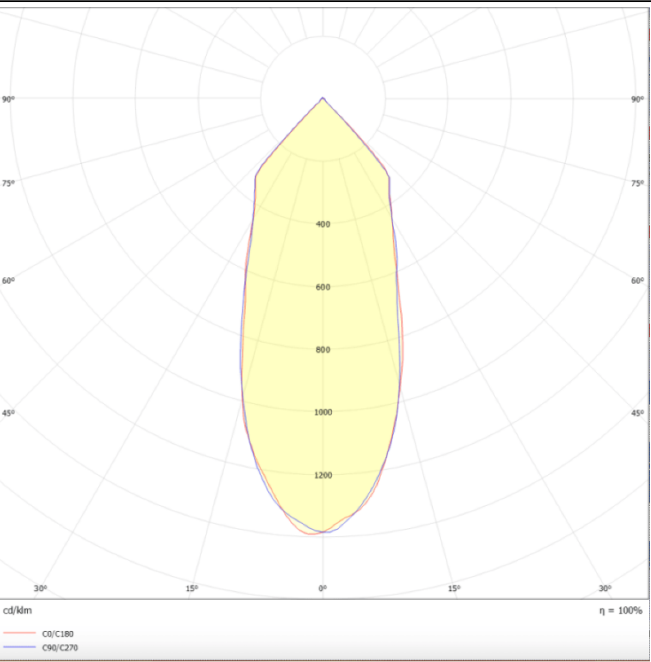


Photometry



TUBULAR-S

Lavov surface mounted downlight from the family TUBULAR-S with a power of 30W and an optics 50 degrees beam angle. CCT 4000K. With a total lumen output of 2550lm and an efficacy of 85lm/W . Made in Die Cast Aluminum and finished in Black color. DALI driver.

| | |
|--------------|---|
| Item code | 86.SD01.3433.02 |
| Product type | Indoor |
| Category | Surface Downlights |
| Family | TUBULAR-S |
| Pictograms | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 30 |
| Real luminous flux (Lm) | 2550 |
| Luminous efficiency (Lm/W) | 85 |
| Beam angle (°) | 50 |
| Life time (h) | 50000h L80B10 |
| IP | IP20 |
| Colour | Black |
| Chip Brand | Philip |
| Control gear included | Yes |
| Control gear | DALI |
| Average life time (h) | 40 |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |