


## TUBULAR-S

Lavov surface downlight from the family with a power of 40W and a beam angle of 20º. Finished in Silver colour. Dimensions Ø140X162 mm .With a total lumen output of 3200lm and a luminous efficacy of 80lm/W. Made in Die Cast Aluminum. Driver DALI. CCT 4000K.

| | |
|---|---|
| **Item code** | **86.SD01.4423.03** |
| **Product type** | **Indoor** |
| **Category** | **Surface Downlights** |
| **Family** | **TUBULAR-S** |
| **Pictograms** |  |

| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **Ø140X162 mm** |

**Scheme**

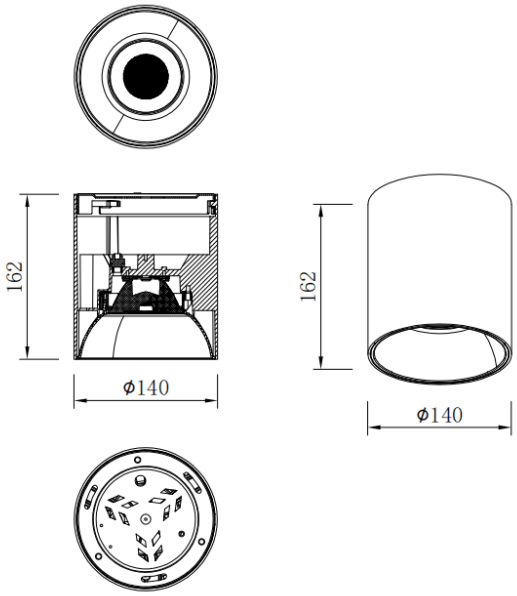


| **Product** | |
|---|---|
| **Real power (W)** | **40** |
| **Real luminous flux (Lm)** | **3200** |
| **Luminous efficiency (Lm/W)** | **80** |
| **Beam angle (º)** | **20** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **IP65** |
| **Colour** | **Silver** |
| **Control gear included** | **Yes** |
| **Control gear** | **DALI** |
| **Light source** | **LED** |
| **Type of LED** | **COB** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |