



#### TUBULAR-S A


Lavov surface mounted downlight from the family TUBULAR-S with a power of 25W and an optics 50 degrees beam angle. CCT 3000K. With a total lumen output of 2000lm and an efficacy of 80lm/W . Made in Die Cast Aluminum and finished in Silver color. ON-OFF driver.

|              |                    |
|--------------|--------------------|
| Item code    | 86.SD05.2331.03    |
| Product type | Indoor             |
| Category     | Surface Downlights |
| Family       | TUBULAR-S A        |
| Pictograms   |                    |

#### Dimensions

Product dimensions (mm) Ø169X139 mm

#### Scheme

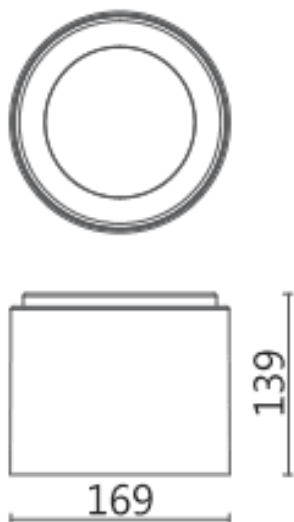

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 25            |
| Real luminous flux (Lm)    | 2000          |
| Luminous efficiency (Lm/W) | 80            |
| Beam angle (°)             | 50            |
| Life time (h)              | 50000h L80B10 |
| IP                         | IP20          |
| Colour                     | Silver        |
| Control gear included      | Yes           |
| Control gear               | ON-OFF        |
| Average life time (h)      | 30            |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |