




### Rock down


Lavov surface downlight from the family Rock down with a switchable power of 10/15/20W and an optics 105,5° degrees . Switchable CCT 3000/4000/6000K. With a total lumen output of 1200/1800/2400lm and a luminous efficiency of 120lm/W. Color stability SDCM3. CCT 3000/4000/6000K. DALI driver. Made in PC housing and PC cover and finished in white color. IP54 and IK10 degree of protection. CRI>80.

### Dimensions

Product dimensions (mm)  $\text{Ø}320 \times \text{H}57 \text{mm}$

### Scheme

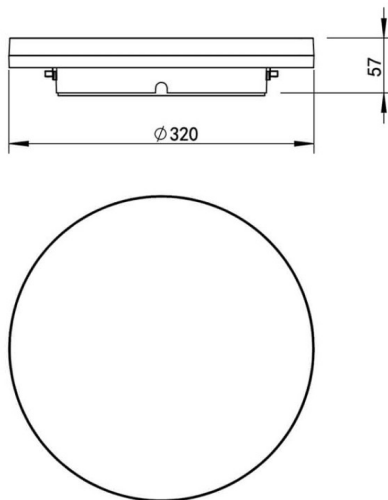

Item code	86.SD07.2303.01
Product type	Indoor
Category	Surface Downlights
Family	Rock
Subfamily	Rock down
Pictograms	

<b>Product</b>	
Real power (W)	10/15/20
Real luminous flux (Lm)	1200/1800/2400
Luminous efficiency (Lm/W)	120
Beam angle (&ordm;)	105,5°
IP	54
Colour	white
Control gear included	yes
Control gear	DALI
Power Factor	>0,9
Flicker Free	yes
Colour temperature (K)	3000/4000/6000
Colour consistency (SDCM)	SDCM<3
CRI	>80
IK	IK10