




### Quadro down

Lavov surface downlight from the family Quadro down with a switchable power of 10/15/20W and an optics 105,5° degrees . Switchable CCT 3000/4000/6000K. With a total lumen output of 1200/1800/2400lm and a luminous efficiency of 120lm/W. Color stability SDCM3. CCT 3000/4000/6000K. DALI driver. Made in PC housing and PC cover and finished in black color. IP54and IK10 degree of protection.CRI>80.

### Dimensions

Product dimensions (mm) L320xW320xH57mm

### Scheme

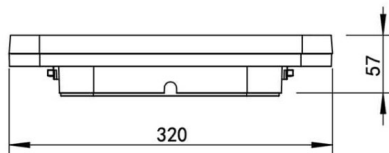

Item code	86.SD08.2303.02
Product type	Indoor
Category	Surface Downlights
Family	Quadro
Subfamily	Quadro down
Pictograms	

Product	
Real power (W)	10/15/20
Real luminous flux (Lm)	1200/1800/2400
Luminous efficiency (Lm/W)	120
Beam angle (°)	105,5°
IP	54
Colour	black
Control gear included	yes
Control gear	DALI
Power Factor	>0,9
Flicker Free	yes
Light source	LED
Type of LED	SMD
Colour temperature (K)	3000/4000/6000
Colour consistency (SDCM)	SDCM3
CRI	>80
IK	IK10