




Rock up&down

Lavov surface downlight from the family Rock up&down with a switchable power of 28/32/35W and an optics 150° down, 110° up degrees. Switchable CCT 3000/4000/6000K. With a total lumen output of 3300/3800/4200lm and a luminous efficiency of 120lm/W. Color stability SDCM<3. CCT 3000/4000/6000K. DALI driver. Made in PC housing and PC cover and finished in white color. IP54 and IK10 degree of protection. CRI>80.

Dimensions


Product dimensions (mm) **Ø450xH70mm**

Scheme

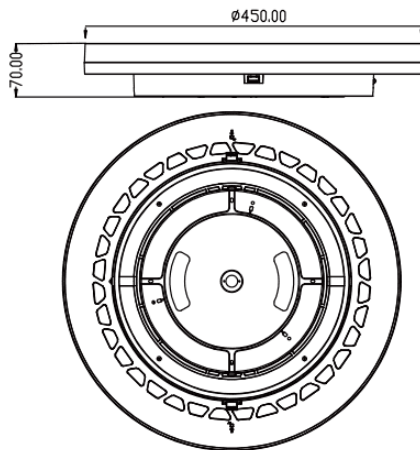

Item code	86.SD09.2303.01
Product type	Indoor
Category	Surface Downlights
Family	Rock
Subfamily	Rock up&down

Pictograms



Product	
Real power (W)	28/32/35
Real luminous flux (Lm)	3300/3800/4200
Luminous efficiency (Lm/W)	120
Beam angle (°)	150° down, 110° up
IP	54
Colour	white
Control gear included	yes
Control gear	DALI
Power Factor	>0,9
Flicker Free	yes
Light source	LED
Type of LED	SMD
Colour temperature (K)	3000/4000/6000
Colour consistency (SDCM)	SDCM3
CRI	>80
IK	IK10