


Rock up&down

Lavov surface sownlight from the family Rock up&down with a switchable power of 28/32/35W and an optics 150º down, 110º up degrees . Switchable CCT 3000/4000/6000K. With a total lumen output of 3300/3800/4200lm and a luminous efficiency of 120lm/W. Color stability SDCM<3. CCT 3000/4000/6000K. DALI driver. Made in PC housing and PC cover and finished in black color. IP54and IK10 degree of protection.CRI>80.

Item code	**86.SD09.2303.02**
Product type	**Indoor**
Category	**Surface mounted Fixtures**
Family	**Rock**
Subfamily	**Rock up&down**
Pictograms	220 240 V · 850° · CRI 80 · CE · 50000h L80B10

Dimensions	
Product dimensions (mm)	**Ø450xH70mm**

Scheme

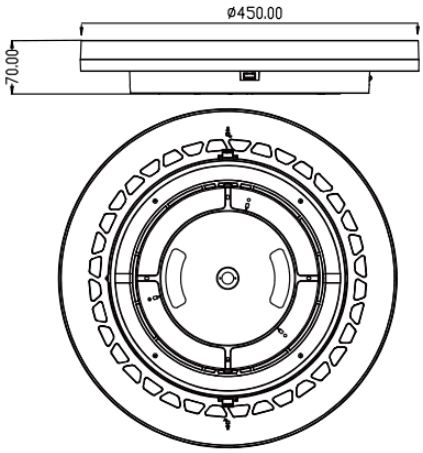

Product	
Real power (W)	**28/32/35**
Real luminous flux (Lm)	**3300/3800/4200**
Luminous efficiency (Lm/W)	**120**
Beam angle (º)	**150º down, 110º up**
IP	**54**
Colour	**black**
Control gear included	**yes**
Control gear	**DALI**
Power Factor	**>0,9**
Flicker Free	**yes**
Light source	**LED**
Type of LED	**SMD**
Colour temperature (K)	**3000/4000/6000**
Colour consistency (SDCM)	**SDCM3**
CRI	**>80**
IK	**IK10**