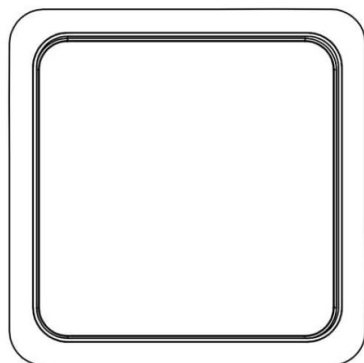
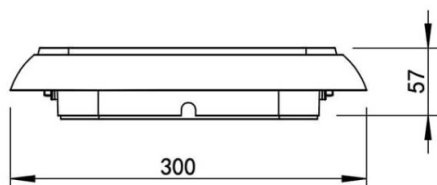








**Quadro up&down**

Lavov surface downlight from the family Quadro up&down with a switchable power of 8/10/15W and an optics 150° down, 110° up degrees. Switchable CCT 3000/4000/6000K. With a total lumen output of 960/1200/1800lm and a luminous efficiency of 120lm/W. Color stability SDCM3. CCT 3000/4000/6000K. On-off driver. Made in PC housing and PC cover and finished in black color. IP54 and IK10 degree of protection. CRI>80.

**Dimensions****Product dimensions (mm)** L300xW300xH57mm**Scheme**

|              |   |
|--------------|---|
| Item code    | 86.SD10.1301.02   |
| Product type | Indoor  |
| Category     | Surface Downlights  |
| Family       | Quadro  |
| Subfamily    | Quadro up&down  |
| Pictograms   |     <br> |

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 8/10/15            |
| Real luminous flux (Lm)    | 960/1200/1800      |
| Luminous efficiency (Lm/W) | 120                |
| Beam angle (°)             | 150° down, 110° up |
| IP                         | 54                 |
| Colour                     | black              |
| Control gear included      | yes                |
| Control gear               | On-off             |
| Power Factor               | >0,9               |
| Flicker Free               | yes                |
| Colour temperature (K)     | 3000/4000/6000     |
| Colour consistency (SDCM)  | SDCM<3             |
| CRI                        | >80                |
| IK                         | IK10               |