





### Quadro up&down







Lavov surface downlight from the family Quadro up&down with a switchable power of 8/10/15W and an optics 150° down, 110° up degrees. Switchable CCT 3000/4000/6000K. With a total lumen output of 960/1200/1800lm and a luminous efficiency of 120lm/W. Color stability SDCM3. CCT 3000/4000/6000K. DALI driver. Made in PC housing and PC cover and finished in black color. IP54 and IK10 degree of protection. CRI>80.

### Dimensions

**Product dimensions (mm)** L300xW300xH57mm

### Scheme

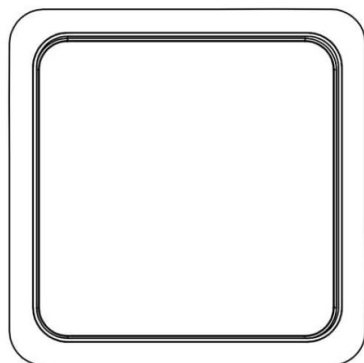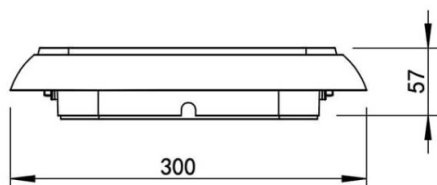

<b>Item code</b>	<b>86.SD10.1303.02</b>
<b>Product type</b>	<b>Indoor</b>
<b>Category</b>	<b>Surface Downlights</b>
<b>Family</b>	<b>Quadro</b>
<b>Subfamily</b>	<b>Quadro up&amp;down</b>
<b>Pictograms</b>	     

<b>Product</b>	
<b>Real power (W)</b>	<b>8/10/15</b>
<b>Real luminous flux (Lm)</b>	<b>960/1200/1800</b>
<b>Luminous efficiency (Lm/W)</b>	<b>120</b>
<b>Beam angle (°)</b>	<b>150° down, 110° up</b>
<b>IP</b>	<b>54</b>
<b>Colour</b>	<b>black</b>
<b>Control gear included</b>	<b>yes</b>
<b>Control gear</b>	<b>DALI</b>
<b>Power Factor</b>	<b>&gt;0,9</b>
<b>Flicker Free</b>	<b>yes</b>
<b>Colour temperature (K)</b>	<b>3000/4000/6000</b>
<b>Colour consistency (SDCM)</b>	<b>SDCM&lt;3</b>
<b>CRI</b>	<b>&gt;80</b>
<b>IK</b>	<b>IK10</b>