



RFLAT


Lavov outdoor Solar Bollard from the family RFLAT with a power of 2W and a optic distribution 360°. With a total lumen output of 300lm and an efficiency of 150lm/W. Manufactured in Die-cast Aluminum+PMMA, Solar Panel: 6V 2,0W, Polycrystalline, Battery Type: Lithium-Ion 3.7V 2,2AH Charging Time: 5-8 Hours, Discharging Time: 10-12 Hours Led: 120 lm/w and finished in black colour.

Item code	86.SO10.1300.02
Product type	Outdoor
Category	Solar Bollards
Family	RFLAT
Pictograms	<div style="display: flex; gap: 10px;"> <div style="border: 1px solid gray; border-radius: 5px; padding: 2px 5px;">CRI 80</div> <div style="border: 1px solid gray; border-radius: 5px; padding: 2px 5px;">IP 65</div> </div>

Dimensions

Product dimensions (mm) 202X160X500

Scheme

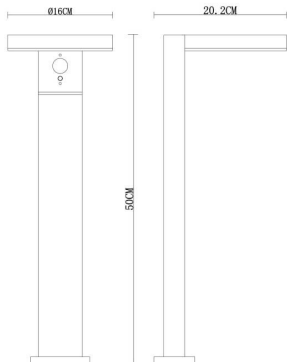

Product

Real power (W)	2
Real luminous flux (Lm)	300
Luminous efficiency (Lm/W)	150
Beam angle (°)	360
IP	65
Colour	black
Light source	LED
Colour temperature (K)	3000K