




### Suspended tube

Lavov tracklight from the family Suspended tube with a power of 12W and a beam angle of 24°. With a real lumen output of 1200lm and an efficiency of 100lm/W. Made in Die cast aluminium and finished in white color. DALI Tunable White Dim 0.1~100%.

### Scheme

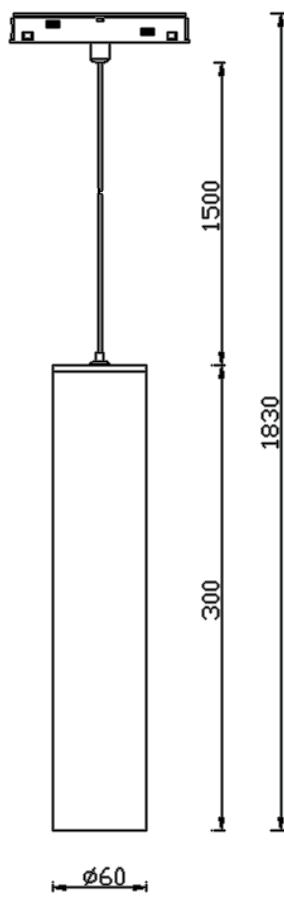

Item code	86.TL01.9320.01																										
Product type	Indoor																										
Category	Tracklights																										
Family	Magnetic Track																										
Subfamily	Suspended tube																										
Pictograms	 220-240 V  CE   IP 20 50000h L80B10																										
Product	<table border="1"> <tr> <td>Real power (W)</td> <td>12</td> </tr> <tr> <td>Real luminous flux (Lm)</td> <td>1200lm</td> </tr> <tr> <td>Luminous efficiency (Lm/W)</td> <td>100</td> </tr> <tr> <td>Beam angle (°)</td> <td>24°</td> </tr> <tr> <td>Colour</td> <td>white</td> </tr> <tr> <td>Chip Brand</td> <td>EPISTAR</td> </tr> <tr> <td>Control gear included</td> <td>YES</td> </tr> <tr> <td>Control gear</td> <td>DALI Tunable White Dim 0.1~100%</td> </tr> <tr> <td>Flicker Free</td> <td>Yes</td> </tr> <tr> <td>Average life time (h)</td> <td>50000hrs L80 B10</td> </tr> <tr> <td>Colour temperature (K)</td> <td>3000</td> </tr> <tr> <td>Colour consistency (SDCM)</td> <td>SDCM&lt;3</td> </tr> <tr> <td>CRI</td> <td>90</td> </tr> </table>	Real power (W)	12	Real luminous flux (Lm)	1200lm	Luminous efficiency (Lm/W)	100	Beam angle (°)	24°	Colour	white	Chip Brand	EPISTAR	Control gear included	YES	Control gear	DALI Tunable White Dim 0.1~100%	Flicker Free	Yes	Average life time (h)	50000hrs L80 B10	Colour temperature (K)	3000	Colour consistency (SDCM)	SDCM<3	CRI	90
Real power (W)	12																										
Real luminous flux (Lm)	1200lm																										
Luminous efficiency (Lm/W)	100																										
Beam angle (°)	24°																										
Colour	white																										
Chip Brand	EPISTAR																										
Control gear included	YES																										
Control gear	DALI Tunable White Dim 0.1~100%																										
Flicker Free	Yes																										
Average life time (h)	50000hrs L80 B10																										
Colour temperature (K)	3000																										
Colour consistency (SDCM)	SDCM<3																										
CRI	90																										

### Product

Real power (W)	12
Real luminous flux (Lm)	1200lm
Luminous efficiency (Lm/W)	100
Beam angle (°)	24°
Colour	white
Chip Brand	EPISTAR
Control gear included	YES
Control gear	DALI Tunable White Dim 0.1~100%
Flicker Free	Yes
Average life time (h)	50000hrs L80 B10
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90