




SAFE

Item code	86.OF03.3451.02				
Product type	Indoor				
Category	Industrial				
Family	SAFE				
Pictograms	<div><div></div><div></div><div><div>IK</div><div>10</div></div><div></div><div>Driver INCL.</div></div> <div><div>CRI</div><div>70</div></div> <div><div>SDCM</div><div>5</div></div> <div><div>IP</div><div>67</div></div>				

Dimensions

Product dimensions (mm)447x359x75mm

Scheme

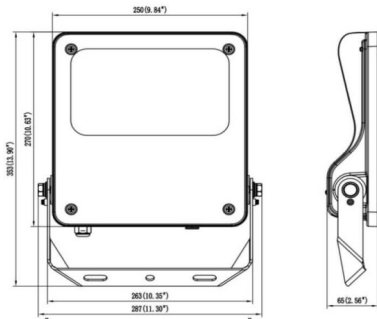

80W/100W

Product	
Real power (W)	100
Real luminous flux (Lm)	14500
Luminous efficiency (Lm/W)	145
Beam angle (°)	55°X125°
IP	IP66
Operating temperature	-30°C to + 50°C
Control gear	ON-OFF
Power Factor	>0,97
Average life time (h)	Up to 100,000hrs LM72
Colour temperature (K)	4000K
Colour consistency (SDCM)	<5
CRI	70
IK	IK08