


## SAFE

| | |
|---|---|
| **Item code** | **86.OF03.5461.02** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **SAFE** |
| **Pictograms** |  |



| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **447x359x75mm** |

**Scheme**

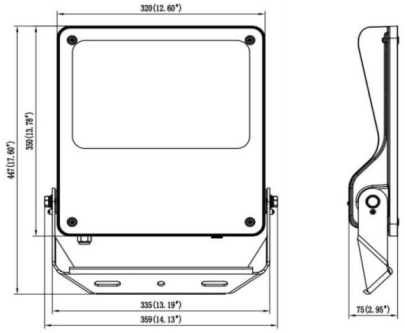



200W

| **Product** | |
|---|---|
| **Real power (W)** | **200** |
| **Real luminous flux (Lm)** | **29000** |
| **Luminous efficiency (Lm/W)** | **145** |
| **Beam angle (º)** | **26ºx60º** |
| **IP** | **IP66** |
| **Operating temperature** | **-30°C to + 50°C** |
| **Control gear** | **ON-OFF** |
| **Power Factor** | **>0,99** |
| **Average life time (h)** | **Up to 100,000hrs LM88** |
| **Colour temperature (K)** | **4000K** |
| **Colour consistency (SDCM)** | **5** |
| **CRI** | **70** |
| **IK** | **IK08** |