



SAFE


|              |                 |
|--------------|-----------------|
| Item code    | 86.OF03.6421.02 |
| Product type | Indoor          |
| Category     | Industrial      |
| Family       | SAFE            |

|            |        |        |  |  |              |
|------------|--------|--------|--|--|--------------|
| Pictograms |        |        |  |  | Driver INCL. |
|            | CRI 70 | SDCM 5 |  |  |              |

Dimensions

|                         |              |
|-------------------------|--------------|
| Product dimensions (mm) | 495x419x75mm |
|-------------------------|--------------|

Scheme

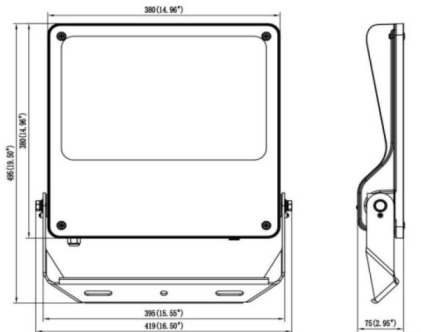

240W/300W

|                            |                       |
|----------------------------|-----------------------|
| Product                    |                       |
| Real power (W)             | 240                   |
| Real luminous flux (Lm)    | 34800                 |
| Luminous efficiency (Lm/W) | 145                   |
| Beam angle (°)             | 25°                   |
| IP                         | IP66                  |
| Operating temperature      | -30°C to + 50°C       |
| Control gear               | ON-OFF                |
| Power Factor               | >0,100                |
| Average life time (h)      | Up to 100,000hrs LM75 |
| Colour temperature (K)     | 4000K                 |
| Colour consistency (SDCM)  | <5                    |
| CRI                        | 70                    |
| IK                         | IK08                  |