



SAFE


Item code	86.OF03.5453.02
Product type	Indoor
Category	Industrial
Family	SAFE
Pictograms	<div><div></div><div></div><div></div><div></div><div>Driver INCL.</div></div> <div><div>IP 69</div><div>CRI 70</div><div>SDCM 5</div></div>

Product	
Real power (W)	200
Real luminous flux (Lm)	29000
Luminous efficiency (Lm/W)	145
Beam angle (°)	55°X125°
IP	IP66
Operating temperature	-30°C to + 50°C
Control gear	DALI
Power Factor	>0,99
Average life time (h)	Up to 100,000hrs LM74
Colour temperature (K)	4000K
Colour consistency (SDCM)	<5
CRI	70
IK	IK08

Dimensions

Product dimensions (mm)	447x359x75mm
-------------------------	--------------

Scheme

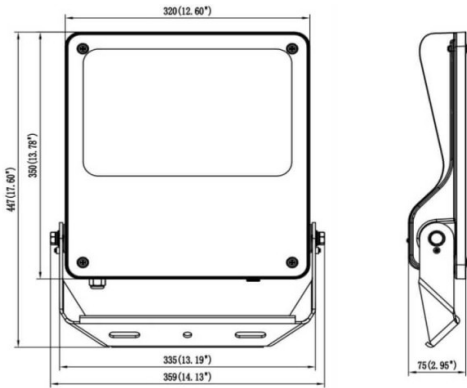

200W