
Código artículo 86.SD07.2301.02




LED Ceiling light
DOR/DOS

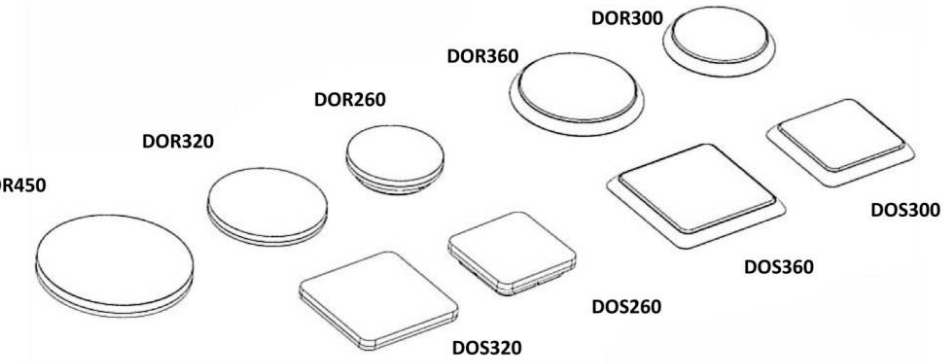


IP54

Required Tools

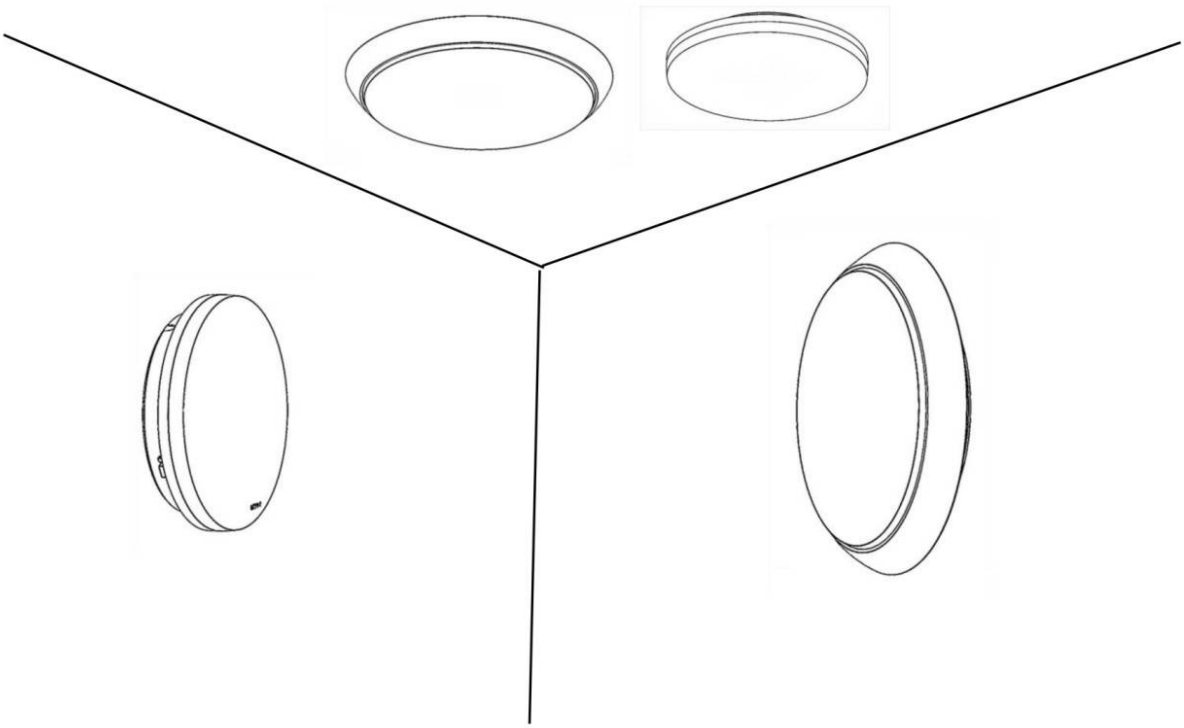

WARNING:




Check that the power is off before conducting any maintenance and assembly work




Caution,danger of electric shock



The installation and commissioning of the luminaire as well as any modification to the luminaire may only be performed by authorized personnel (qualified electrician).

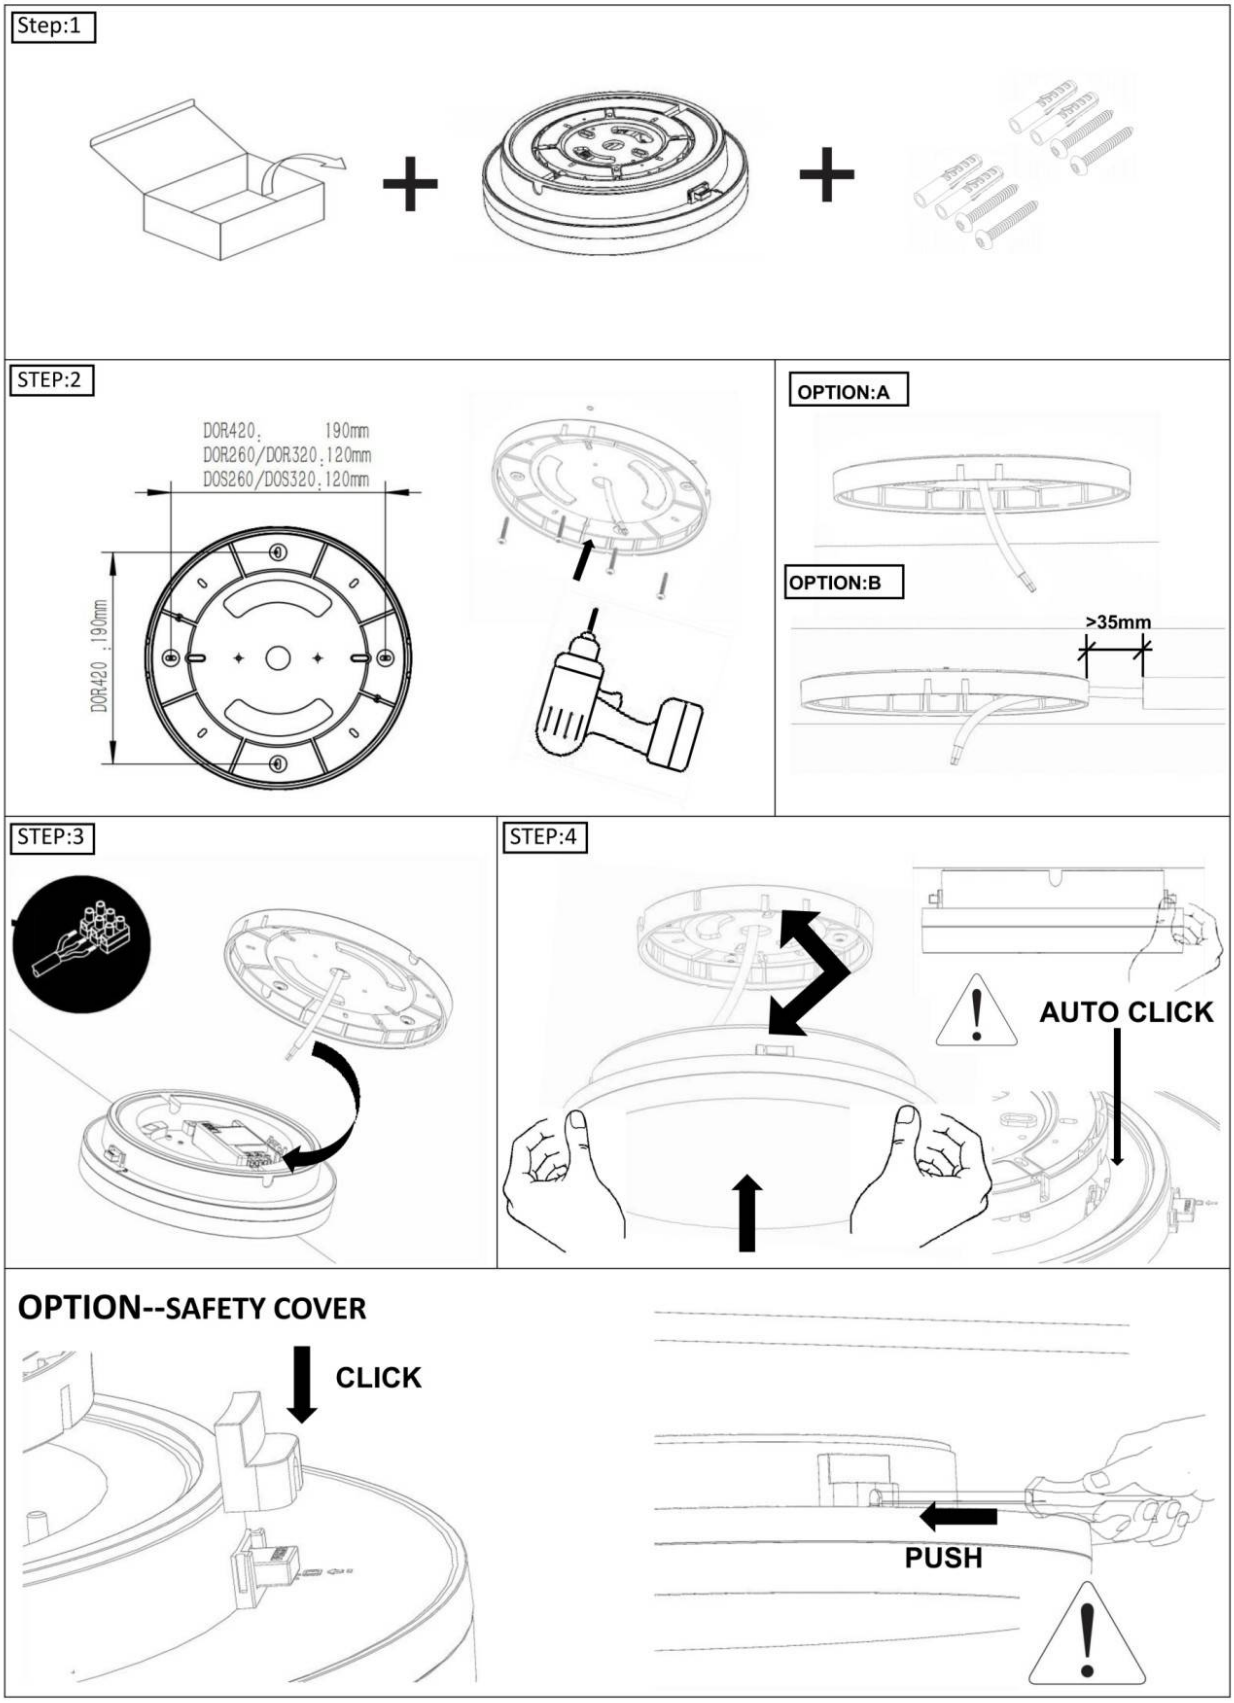
Step:1
STEP:2
DOR420: 190mm
DOR260/DOR320: 120mm
DOS260/DOS320: 120mm
DOR420: 190mm
OPTION:A
OPTION:B
>35mm
STEP:3
STEP:4
AUTO CLICK
OPTION--SAFETY COVER
CLICK
PUSH


I. WIRING DIAGRAMS: CCT+POWER/SWITCHABLE

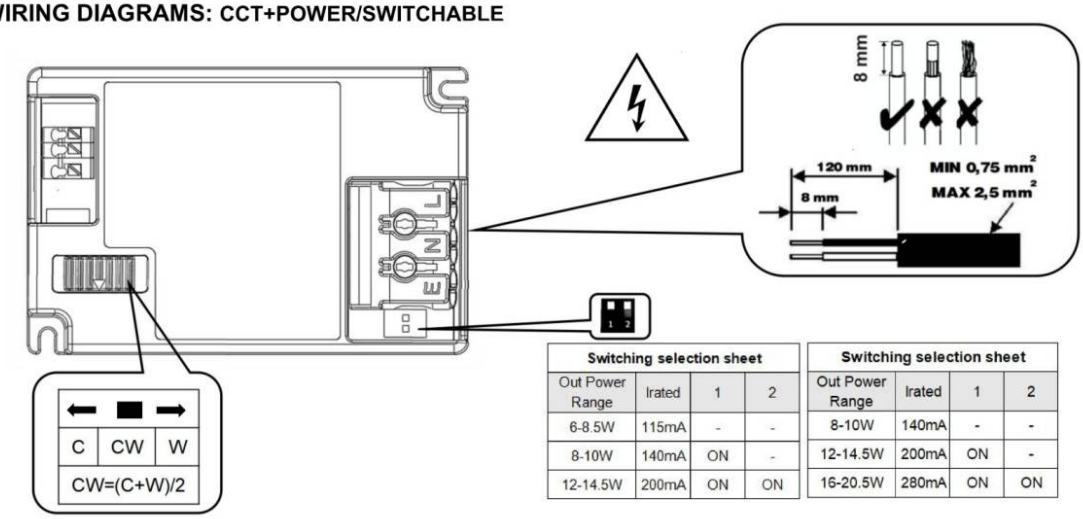

Switching selection sheet			
Out Power Range	Irated	1	2
6-8.5W	115mA	-	-
8-10W	140mA	ON	-
12-14.5W	200mA	ON	ON

Switching selection sheet			
Out Power Range	Irated	1	2
8-10W	140mA	-	-
12-14.5W	200mA	ON	-
16-20.5W	280mA	ON	ON


II. WIRING DIAGRAMS: CCT+POWER/SWITCHABLE+SENSOR/EM2

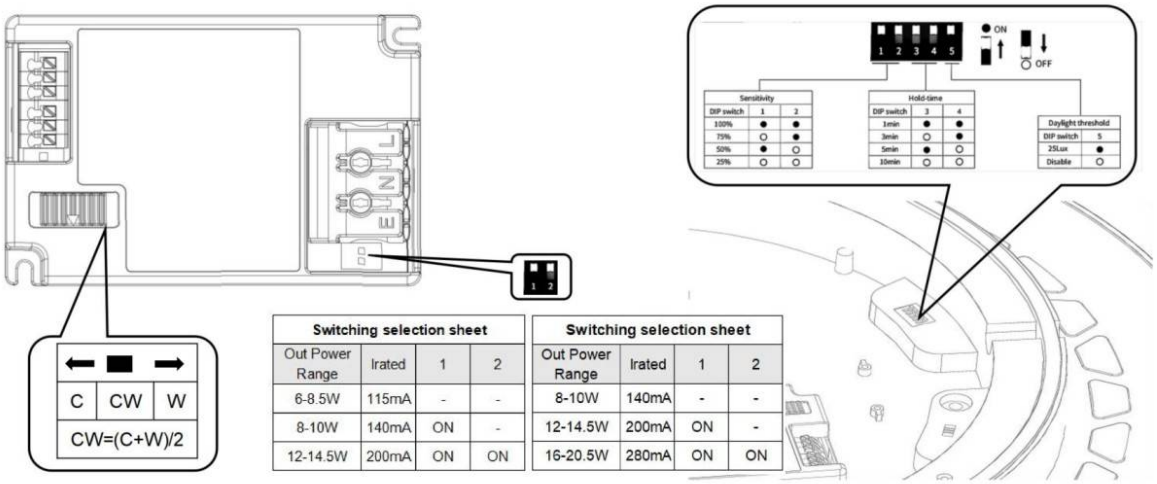

Switching selection sheet			
Out Power Range	Irated	1	2
6-8.5W	115mA	-	-
8-10W	140mA	ON	-
12-14.5W	200mA	ON	ON

Switching selection sheet			
Out Power Range	Irated	1	2
8-10W	140mA	-	-
12-14.5W	200mA	ON	-
16-20.5W	280mA	ON	ON

III. WIRING DIAGRAMS: CCT+DALI (TCI DT6）

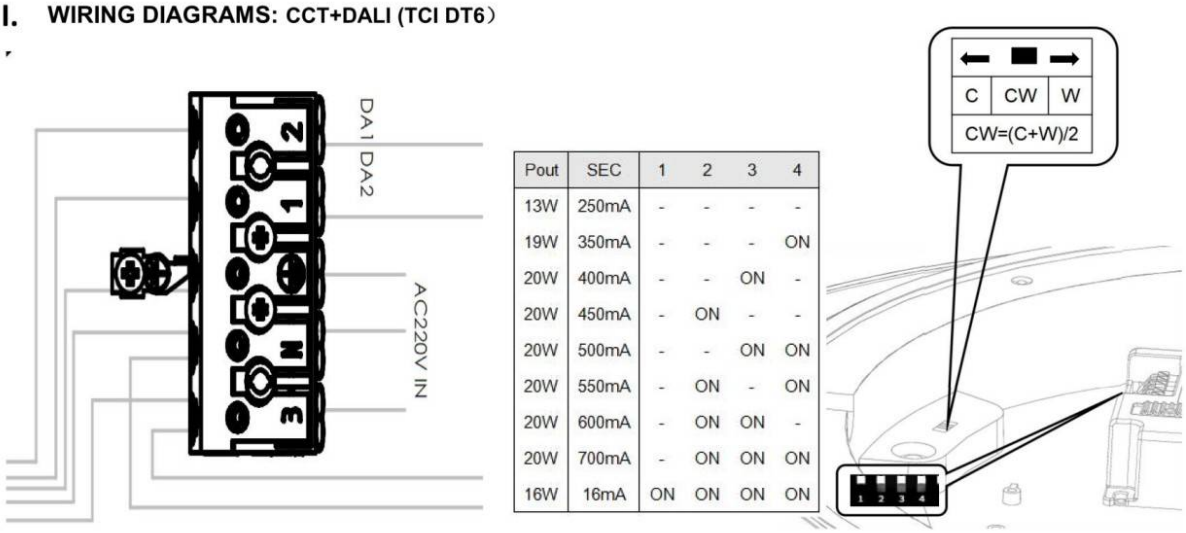

Pout	SEC	1	2	3	4
13W	250mA	-	-	-	-
19W	350mA	-	-	-	ON
20W	400mA	-	-	ON	-
20W	450mA	-	ON	-	-
20W	500mA	-	-	ON	ON
20W	550mA	-	ON	-	ON
20W	600mA	-	ON	ON	-
20W	700mA	-	ON	ON	ON
16W	16mA	ON	ON	ON	ON