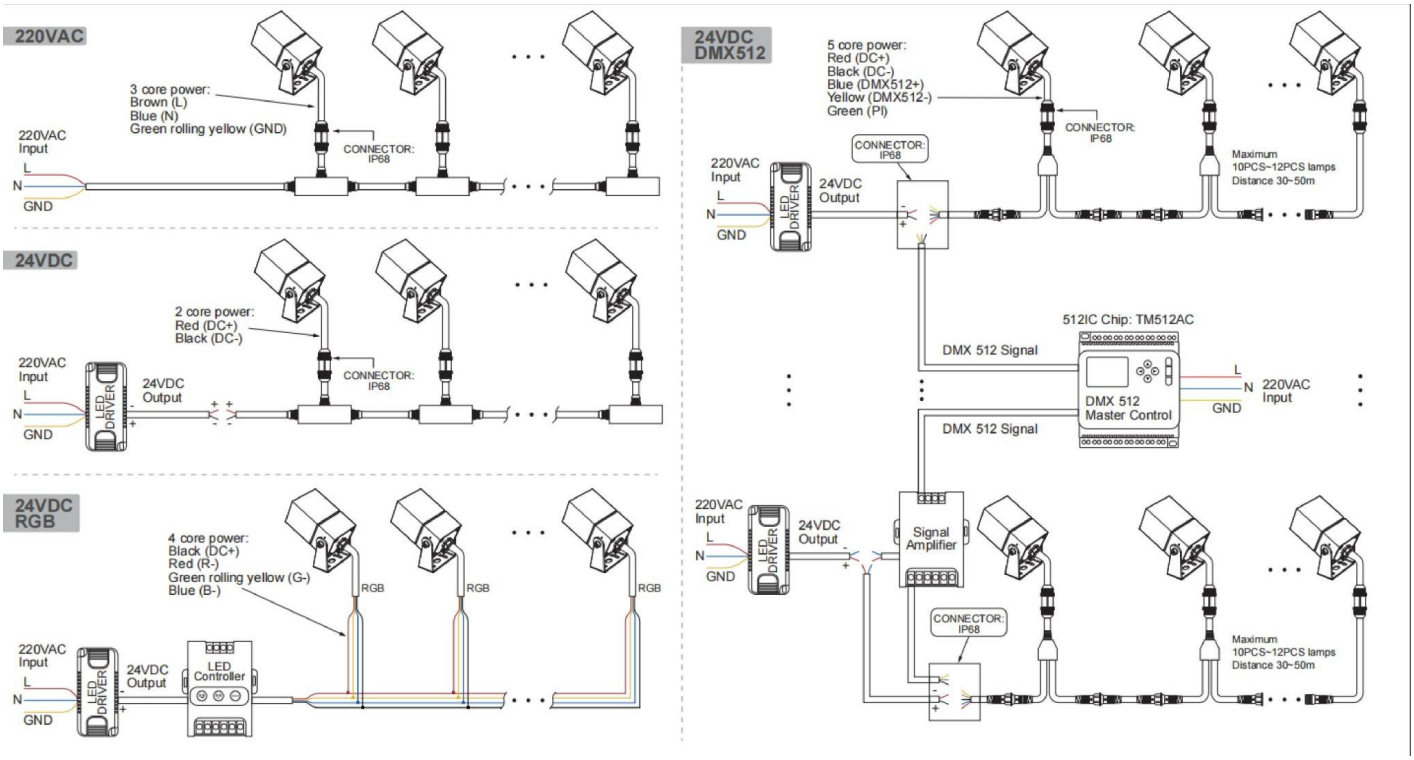
220VAC
3 core power:
Brown (L)
Blue (N)
Green rolling yellow (GND)
CONNECTOR: IP68
220VAC Input
L
N
GND
24VDC
2 core power:
Red (DC+)
Black (DC-)
CONNECTOR: IP68
220VAC Input
L
N
GND
LED DRIVER
24VDC Output
24VDC RGB
4 core power:
Black (DC+)
Red (R-)
Green rolling yellow (G-)
Blue (B-)
RGB
RGB
RGB
220VAC Input
L
N
GND
LED DRIVER
24VDC Output
LED Controller
24VDC DMX512
5 core power:
Red (DC+)
Black (DC-)
Blue (DMX512+)
Yellow (DMX512-)
Green (PI)
CONNECTOR: IP68
CONNECTOR: IP68
Maximum 10PCS~12PCS lamps
Distance 30~50m
220VAC Input
L
N
GND
LED DRIVER
24VDC Output
512IC Chip: TM512AC
DMX 512 Signal
DMX 512 Master Control
L
N
GND
220VAC Input
DMX 512 Signal
220VAC Input
L
N
GND
LED DRIVER
24VDC Output
Signal Amplifier
CONNECTOR: IP68
Maximum 10PCS~12PCS lamps
Distance 30~50m