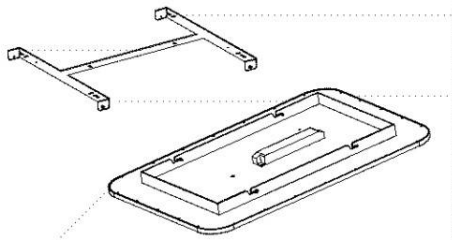
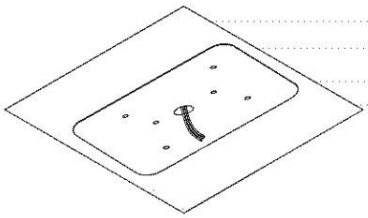


① 

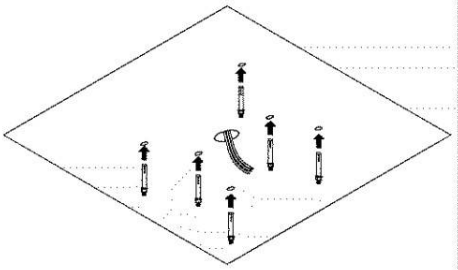
The picture is for reference only, the actual product shall prevail!
Warning: Cut off the power supply before installation to prevent electric shock!

Screw		X4
Screw		X4

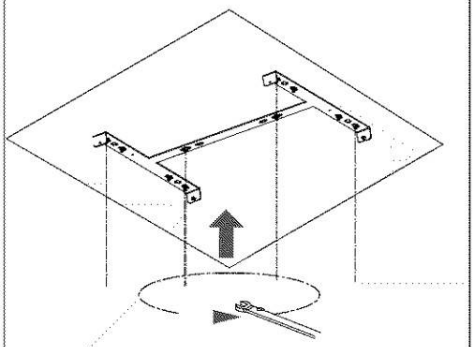
② 

First select the place to be installed,place the ceiling bracket in the mounting position, and mark it with a pen core

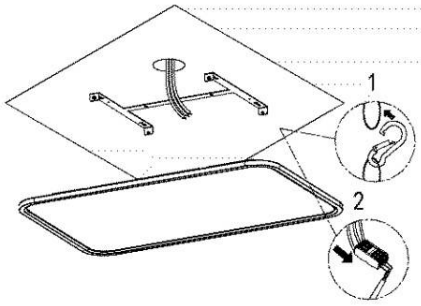
Then drill holes for screw A of the corresponding size.If you need to hide the outlet, An AC line control needs to be reserved in the middle of the ceiling

③ 

Insert screw A into the hole

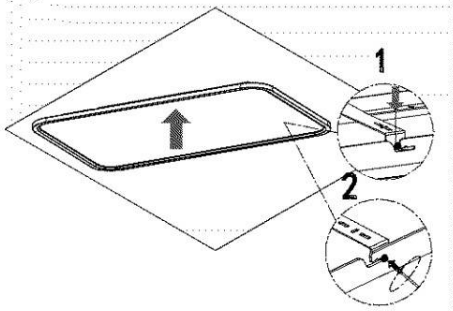
④ 

Take out 4 screws B and use a screwdriver to fix the ceiling bracket to the ceiling.

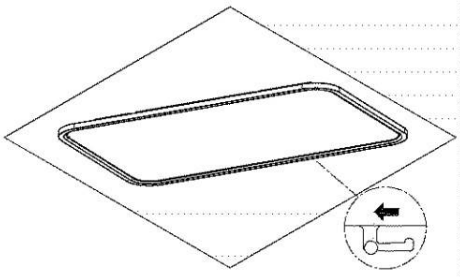
⑤ 

1.Connect the ceiling AC wire to the plate terminal, wiring method: (L-live wire) (N-neutral wire) (-ground wire)

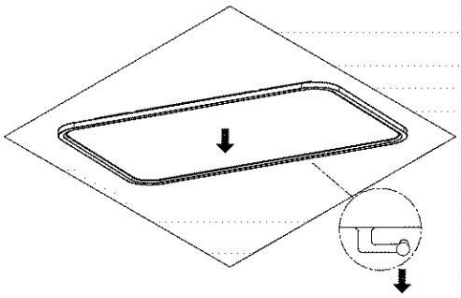
2.Hang up the anti-fall rope

⑥ 

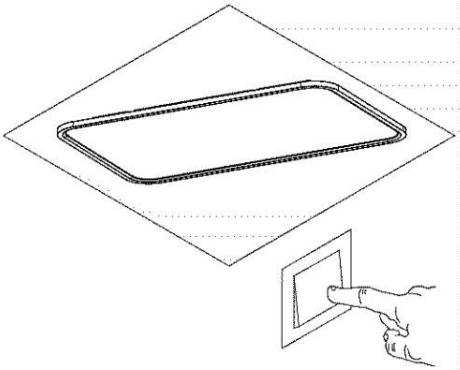
Lift the frame of the lamp and align the four notches with the four installation pillars of the ceiling bracket.

⑦ 

Rotate the frame of the lamp clockwise so that it locks into place with the ceiling bracket

⑧ 

Make sure that the frame of the lamp is securely attached to the ceiling bracket

⑨ 

After installation, turn on the power and light up the lamps.