



## Installation Steps

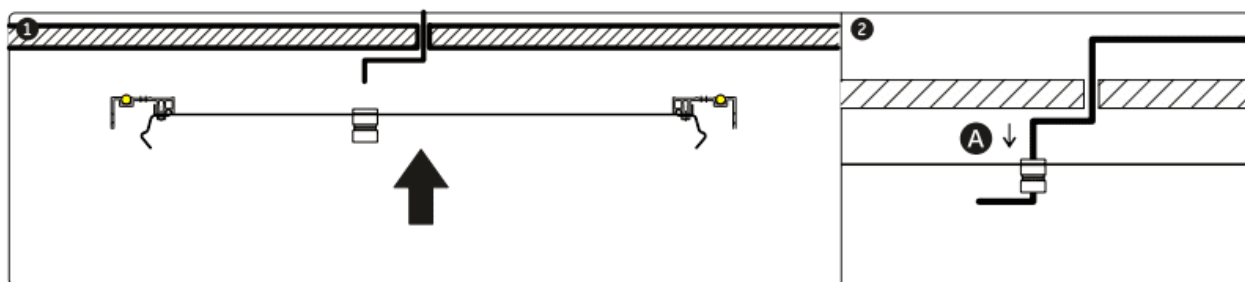

Fixing the ceiling mounted back-plate to the ceiling.


Pass the AC cable through the waterproof connector and tighten it to prevent water.

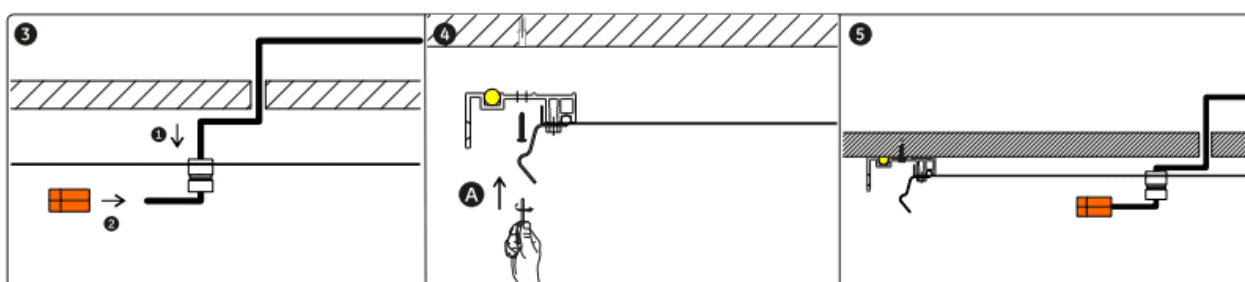

Plug in AC terminal Insert cable.

Install the ceiling bracket to the ceiling. And according to the size of the lamp.


Complete the installation of the ceiling tray.

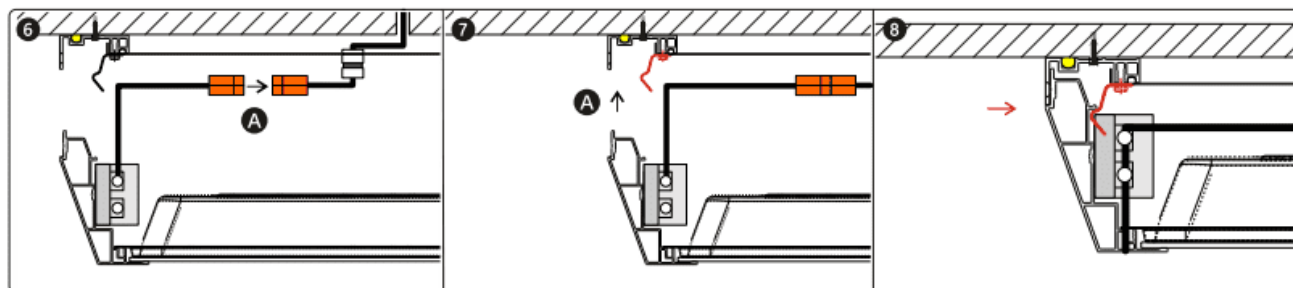


Plug the of AC terminals to driver.

Lift the fixture up and insert it into the ceiling plate.

The stainless steel clips on the ceiling plate hangs back on the light body.

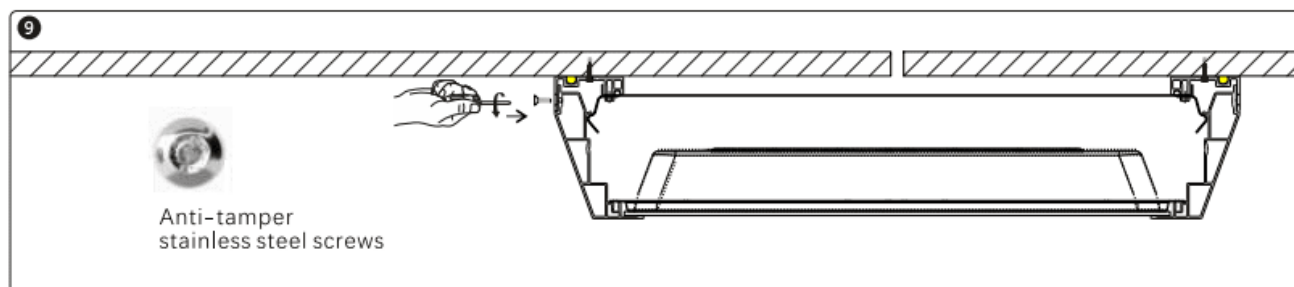

Lock the tamper proof screws, through the ceiling plate, into the light body. Achieve fixing and sealing.

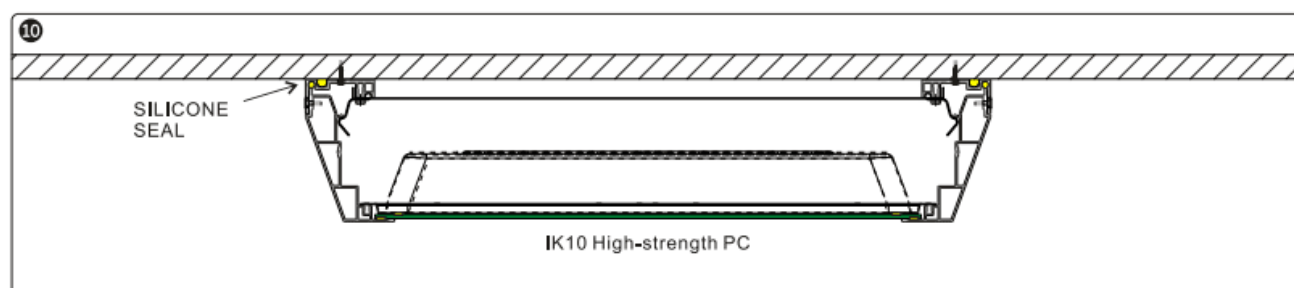

Completing the installation, the yellow part is a silicone sealing ring, resulting in a completely seamless exterior to IP65 and an IK10 rating with a high-strength PC diffuser.