



Tracking and luminaire:


First trunking rail should have one side connecting plate&last trunking rail with no connecting plate on both sides, then fix the Luminaire to trunking rail then lock holder, then keep end caps at both sides.




Step 1 Mounting Suspension






Step 2 Connecting Power Supply







Step 3 Connecting Trunking Rail




Step 4 Mounting Luminaire



Step 5 LED linear lighting system




Wire diagram of triple circuits function



Pendant and mounting installation

Starting Installation distances point should be 800 mm to 1000 mm, then in between 1st & 2nd point should be 3000 mm max

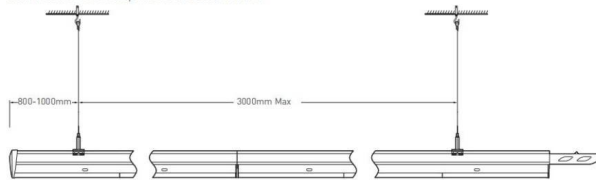

Four options for installation



Safety notes:
Installation should be performed only by
qualified electrician .

- Make sure no voltage while installation .
- Connect cable wires according to wire labeling.
- Max current should not exceed 16A in one power feed in circuit.



LED linear lighting System composition

Terminal module:


Terminal module can be independently installed as
a single unit, it also can be connected at end of one
linear light row.




- 1 Trunking Rail
- 2 Power cable feed in hole
- 3 Luminaire
- 4 Driver
- 5 Lock holder
- 6 End cap
- 7 Male connector
- 8 Female connector
- 10 Installation cord

Step 1 Mounting Suspension

Drill a hole on ceiling



Fix mounting hook into ceiling




Adjust length of suspension cord:
a. press down Hexagon bolt;
b. Pull in/out cord to adjust length



Step 2 Connecting Power Supply


Cut the Rubber cap to pass the power cable



Screw in the conduit gland




Put in conduit with cable inside and
pull up conduit gland to lock



Connect wires according labeling on
wires to feed in connector then connect
to connector in trunking rail

Step 3 Mounting Luminaire

Slide knob to select phase L1/L2/L3



Make sure male & female connectors
in right position then fix the luminaire
to trunking rail



Push the sliding lock to lock the
luminaire to trunking rail

