





1. Take out the high bay light and put up-right, and then check to make sure the lamp body is all right.

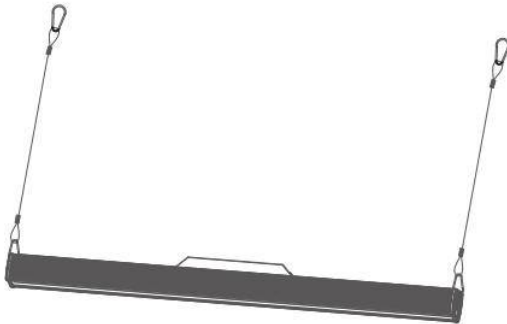

2. **Suspended Installation** : Making clasp, rings and lifting rope fixed successively on high bay and then hanging the other end of lifting rope in right place like below picture.

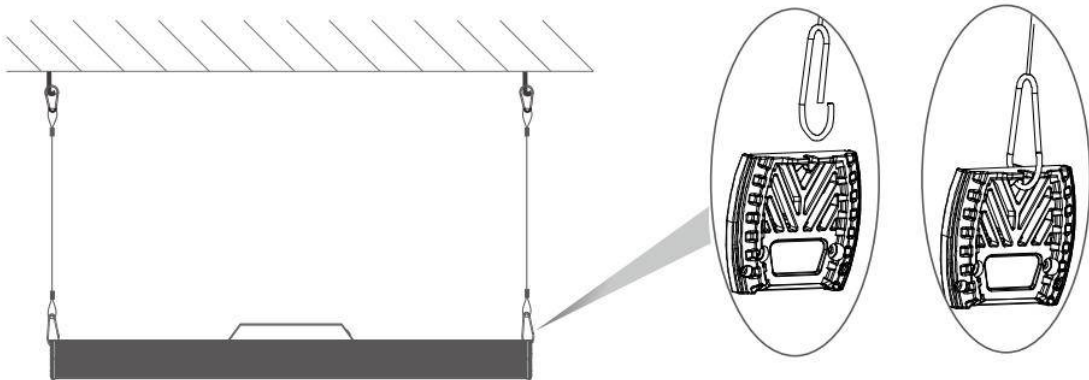

NOTE:  
The distance between the two holes in the ceiling, recommended range.



Item	Y
100W High Bay Light	$645 \pm 5\text{mm}$
150W High Bay Light	$955 \pm 5\text{mm}$
200W High Bay Light	$1260 \pm 5\text{mm}$

3. Make connection with mains supply as per following instruction and light up.

