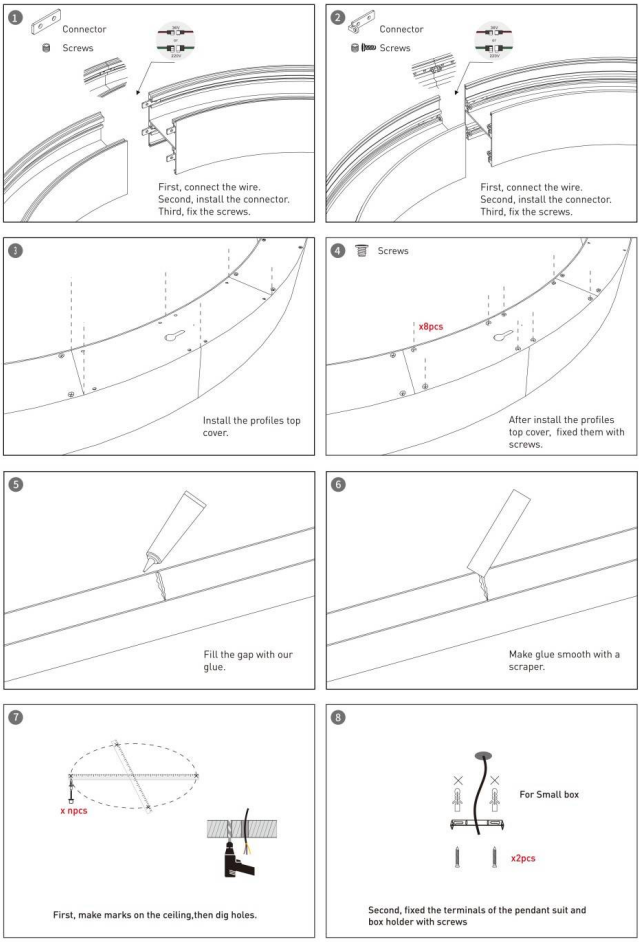
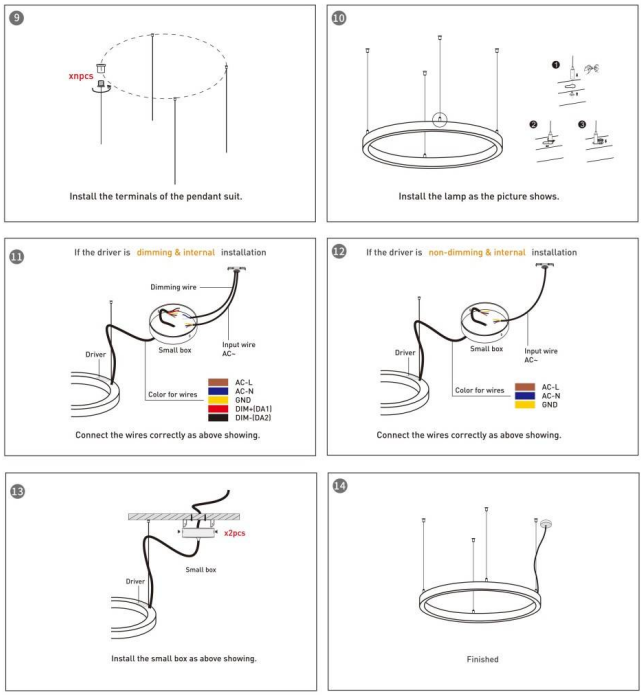



1
Connector
Screws
First, connect the wire.
Second, install the connector.
Third, fix the screws.
2
Connector
Screws
First, connect the wire.
Second, install the connector.
Third, fix the screws.
3
Install the profiles top cover.
4
Screws
x8pcs
After install the profiles top cover, fixed them with screws.
5
Fill the gap with our glue.
6
Make glue smooth with a scraper.
7
x npcs
First, make marks on the ceiling,then dig holes.
8
For Small box
x2pcs
Second, fixed the terminals of the pendant suit and box holder with screws


9
xnpcs
Install the terminals of the pendant suit.
10
Install the lamp as the picture shows.
11
If the driver is dimming & internal installation
Dimming wire
Driver
Small box
Input wire AC~
Color for wires
AC-L
AC-N
GND
DIM+(DA1)
DIM-(DA2)
Connect the wires correctly as above showing.
12
If the driver is non-dimming & internal installation
Driver
Small box
Input wire AC~
Color for wires
AC-L
AC-N
GND
Connect the wires correctly as above showing.
13
x2pcs
Small box
Driver
Install the small box as above showing.
14
Finished