



## Instruction Manual



### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to + 45°C(-4°F to +113°F)			
	With PIR	-20°C to + 40°C(-4°F to +104°F)			
	DALI	-30°C to + 50°C(-22°F to +122°F)			
Storing Temperature		-40°C to + 70°C(-40°F to +158°F)			

### Dimmable

 DIM+/DA1 DIM-/DA2 Aux 12Vdc + L brown black N blue white GND yellow/green green	 purple gray	or	 purple pink	or	 blue white	or	 brown blue	or	 black gray	or	 red orange
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
 DIM+/DA1 DIM-/DA2 Aux 12Vdc + L brown black N blue white GND yellow/green green	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
 DIM+/DA1 DIM-/DA2 Aux 12Vdc + L brown black N blue white GND yellow/green green	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red
	 purple gray	or	 purple pink	or	 purple gray	or	 purple pink	or	 black white	or	 red




Warning! do not wire dim cord to high voltage, or dim function will fail.

- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS

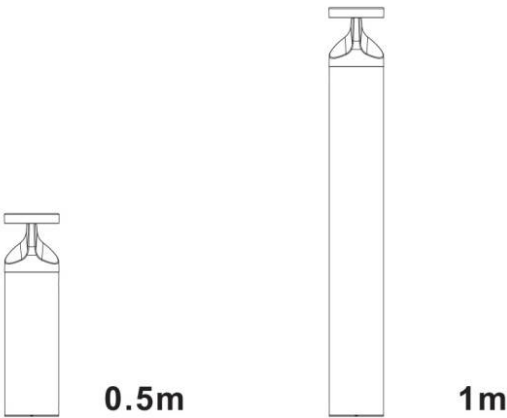

Physical Dimensions(mm/inch)



Installation

