




## Instruction Manual



### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.

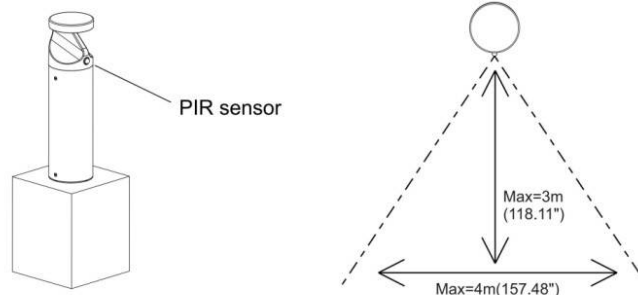


Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to + 45°C(-4°F to +113°F)			
	With PIR	-20°C to + 40°C(-4°F to +104°F)			
	DALI	-30°C to + 50°C(-22°F to +122°F)			
Storing Temperature		-40°C to + 70°C(-40°F to +158°F)			

### Dimmable

		DIM+/DA1  or  or  or  or  or DIM-/DA2  or  or  or  or  or									
		DIM+/DA1  or  or  or DIM-/DA2  or  or  or Aux 12Vdc+  or  or  or									
		DIM+/DA1  or  or  or DIM-/DA2  or  or  or Aux 12Vdc+  or  or  or Aux 12Vdc-  or  or  or									
L N @ GND		@ GND   or  or DIM+/DA1  or  or DIM-/DA2  or  or DIM+/DA2  or  or									

Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS

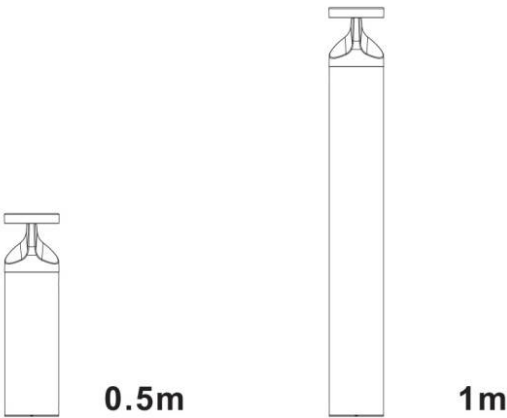

Physical Dimensions(mm/inch)



Installation

