


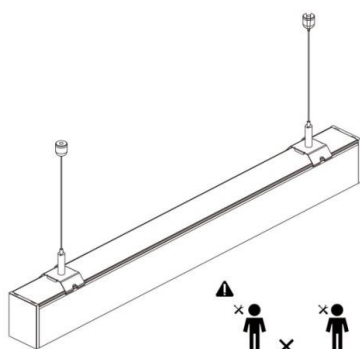

| No. | Accessories            | Picture | No. | Accessories  | Picture |
|-----|------------------------|---------|-----|--------------|---------|
| 1   | Plastic expansion pipe |         | 6   | Lock nut     |         |
| 2   | Screw                  |         | 7   | Lock bolt    |         |
| 3   | Cylindrical bolt       |         | 8   | Metal buckle |         |
| 4   | Cylindrical nut        |         | 9   | Connector 2  |         |
| 5   | Seizing wire           |         | 10  | M6 Screw     |         |

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person


If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

Terminal block not included. Installation may require advice from a qualified person.


## Installation steps



1. Drill plastic expansion pipe into ceiling, put the phillips screw through cylindrical bolt, then into expansion pipe, as diagrammatic deiction



2. Put seizing wire (with small ends) through cylindrical nut




3. Screw the cylindrical nut to the cylindrical bolt



4. Installed seizing wire




5. Put lock bolt through metal buckle, diagrammatic direction




6. Screw lock nut to the lock bolt




7. Installed metal buckle




8. Buckle into the slot of lamp



9. Connect the wire and buckle by pressing the spring button on the top of the lock nut, adjust wire length




10. Connect power cord




11. Suspended linear light


## Connect steps




12. Open the cover with a slotted




13. Unscrew the screws on end cap with a Phillips screwdriver




14. Open the end cap




15. Connect lamps by connector, make sure both linear lights linked seamless, tighten the screws



16. Connect power cord



17. Put cover on



18. Seamless connected suspended linear light