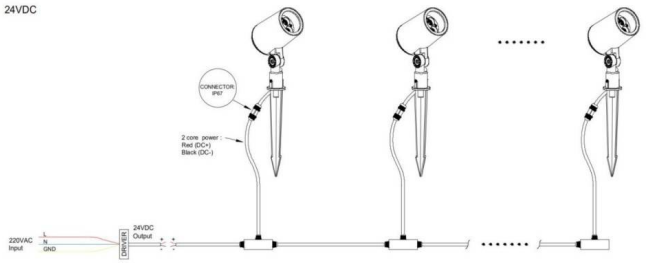
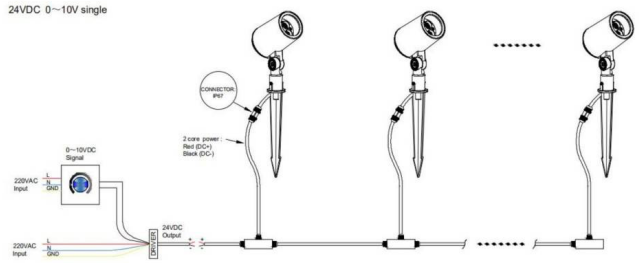
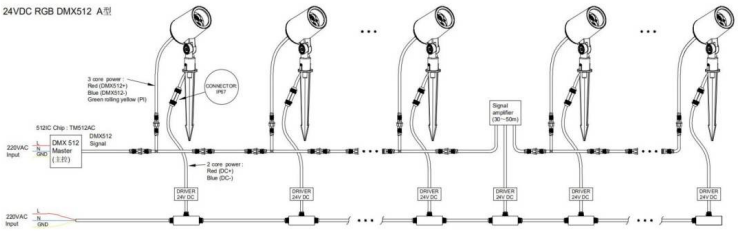

220VAC
CONNECTOR IP67
3 core power :
Red (L)
Blue (N)
Green rolling yellow (GND)
220VAC Input
L
N
GND


24VDC
CONNECTOR IP67
2 core power :
Red (DC+)
Black (DC-)
220VAC Input
L
N
GND
DRIVER
24VDC Output
+
-


24VDC 0~10V single
CONNECTOR IP67
2 core power :
Red (DC+)
Black (DC-)
0~10VDC Signal
220VAC Input
L
N
GND
DRIVER
24VDC Output
+
-


24VDC RGB DMX512 A型
3 core power :
Red (DMX512+)
Blue (DMX512-)
Green rolling yellow (PE)
CONNECTOR IP67
512IC Chip : TM512AC
DMX 512 Master (3 PI)
DMX512 Signal
220VAC Input
L
N
GND
2 core power :
Red (DC+)
Blue (DC-)
Signal amplifier (30~50m)
DRIVER 24V DC