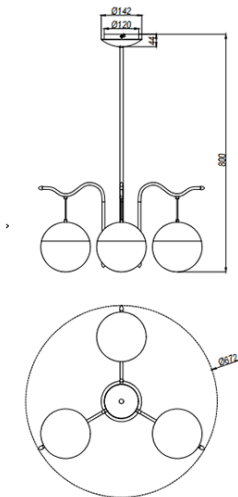


**Dimensions****Product dimensions (mm)** **Φ672\*800****Esquema****PYPE**

Lavov Interior Pendant from the family Pendant with a power of 54W and a 270° degrees beam angle. Surface mounted installation With a total lumen output of 4320lm and a luminous efficiency of 80lm/W. Driver ON-OFF .Made in Iron+Acrylic. Class I issolation. IP20 and IK . Mains voltage . Finished in Brass+Matt Opal colour. CCT 3000K.CRI80

|                         |                               |
|-------------------------|-------------------------------|
| <b>Código artículo</b>  | <b>MT4430L-3PC.54W</b>        |
| <b>Tipo de producto</b> | <b>Decorative</b>             |
| <b>Categoría</b>        | <b>Luminarias suspendidas</b> |
| <b>Familia</b>          | <b>PYPE</b>                   |
| <b>Pictograms</b>       |                               |

|                                     |                        |
|-------------------------------------|------------------------|
| <b>Producto</b>                     |                        |
| <b>Potencia real (W)</b>            | <b>54</b>              |
| <b>Flujo luminoso real (lm)</b>     | <b>4320</b>            |
| <b>Eficacia luminosa (lm/W)</b>     | <b>80</b>              |
| <b>Ángulo de apertura</b>           | <b>270°</b>            |
| <b>Tiempo de vida</b>               | <b>/</b>               |
| <b>IP</b>                           | <b>20</b>              |
| <b>Clase de aislamiento</b>         | <b>Class I</b>         |
| <b>Color</b>                        | <b>Brass+Matt Opal</b> |
| <b>Driver incluido</b>              | <b>yes</b>             |
| <b>Equipo</b>                       | <b>ON-OFF</b>          |
| <b>Fuente de luz</b>                | <b>LED</b>             |
| <b>Tipo de LED</b>                  | <b>SMD</b>             |
| <b>Temperatura de color (K)</b>     | <b>3000K</b>           |
| <b>Consistencia de color (SDCM)</b> | <b>SDCM3</b>           |
| <b>CRI</b>                          | <b>80</b>              |