



## LED High Bay Light

### Installation Instructions



#### Physical Dimensions(Unit: mm/inch)

100W/150W/200W




Product Specifications	100W	150W	200W
Input Voltage	100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)		
Power Frequency	50 / 60 Hz		
Outlook Dimensions	Ø290x167mm(Ø11.41"x6.57")		
Luminaire Net Weight(±6%)	1.9kg(4.19Lbs)		
Working Temperature	-30°C to +50°C(-22°F to +122°F)		-30°C to +45°C (-22°F to +113°F)
Storing Temperature	-40°C to +70°C(-40°F to +158°F)		

\* Please subject to actual product for accurate weight.

1

#### Power Selectable

Caution:  
Please power off the luminaire before adjusting the DIP switch.  
Please do not use metal tool to adjust the DIP switch.  
Please adjust the switch gently.

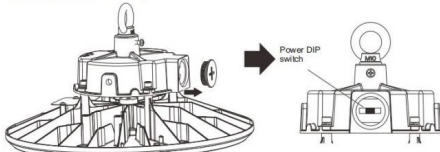

#### Power Selectable

A	B	C
---	---	---

100% 80% 60%

A(100%) B(80%) C(60%)


100W 80W 60W

150W 120W 90W


200W 160W 120W

\* The tolerance for power is ±10%


#### Sensor Mount

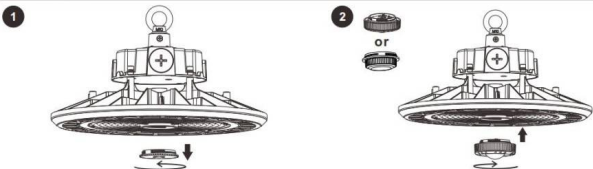


#### Suspension Mount

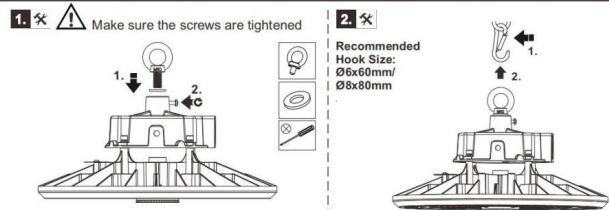

#### Ceiling Mount(Unit: mm/inch)

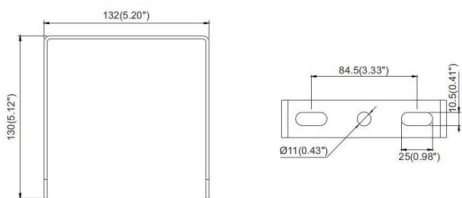


2

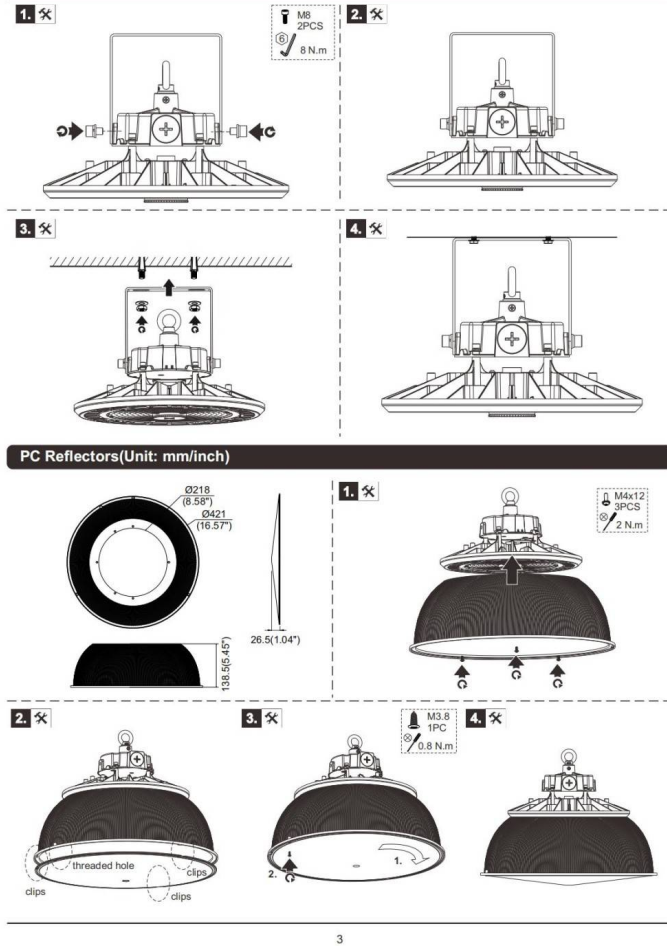

3

**Aluminum Reflectors(Unit: mm/inch)**

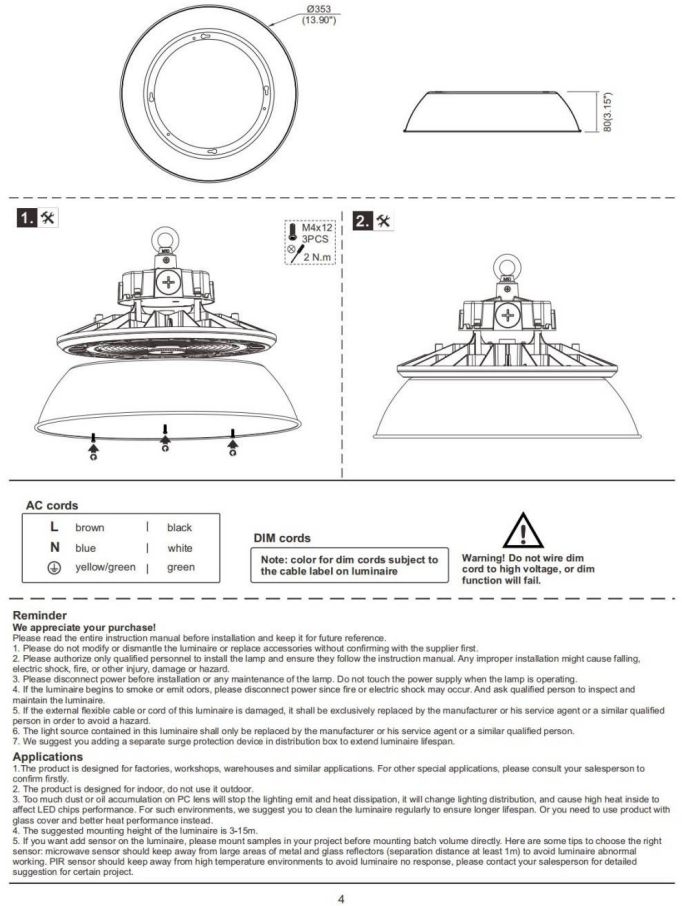

4