

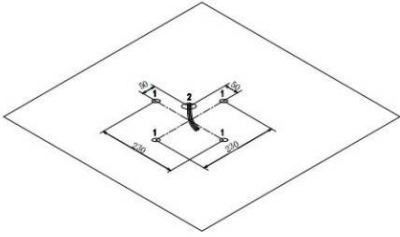
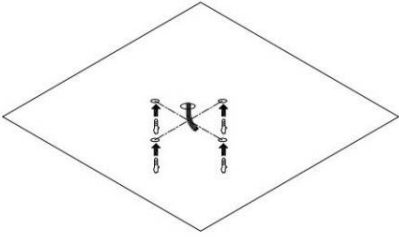
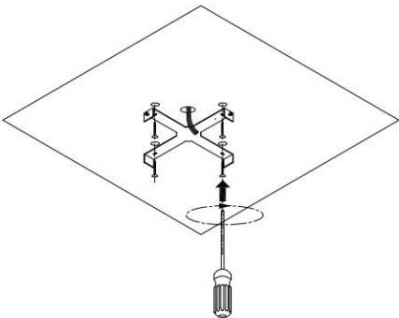
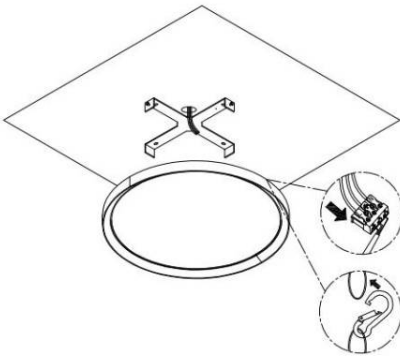
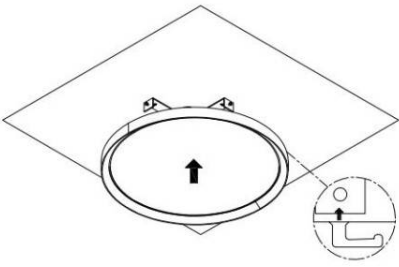
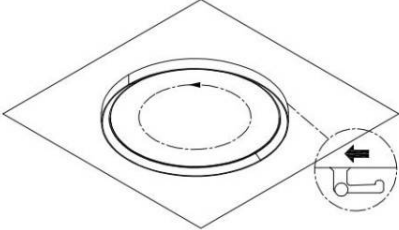
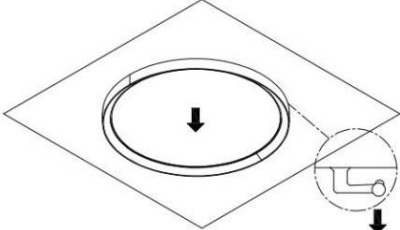


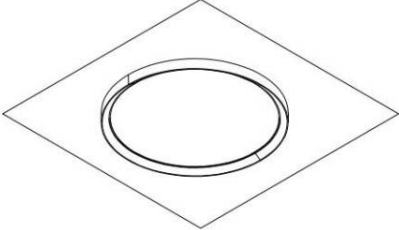

①  The picture is for reference only, the actual product shall prevail! Warning: Cut off the power supply before installation to prevent electric shock! <table border="1" data-bbox="90 667 560 763"> <tr> <td>Screw</td><td></td><td>X4</td></tr> <tr> <td>Screw</td><td></td><td>X4</td></tr> </table>	Screw		X4	Screw		X4	②  First select the place to be installed, place the ceiling bracket in the mounting position, and mark it with a pen core Then drill holes for screw A of the corresponding size. If you need to hide the outlet, An AC line control needs to be reserved in the middle of the ceiling	③  Insert screw A into the hole
Screw		X4						
Screw		X4						
④  Take out 4 screws B and use a screwdriver to fix the ceiling bracket to the ceiling.	⑤  1. Connect the ceiling AC wire to the plate terminal, wiring method: (L-live wire) (N-neutral wire) (-ground wire) 2. Hang up the anti-fall rope	⑥  Lift the frame of the lamp and align the four notches with the four installation pillars of the ceiling bracket.						
⑦  Rotate the frame of the lamp clockwise so that it locks into place with the ceiling bracket.	⑧  Make sure that the frame of the lamp is securely attached to the ceiling bracket.	⑨  After installation, turn on the power and light up the lamps.						