





## Instruction Manual



⑤

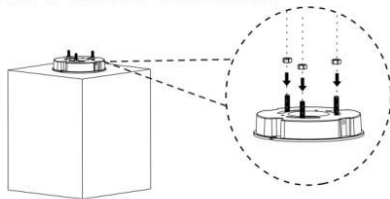

The direction of light should be on both side of notch. Please install bollard head properly.




⑥





⑦



⑧

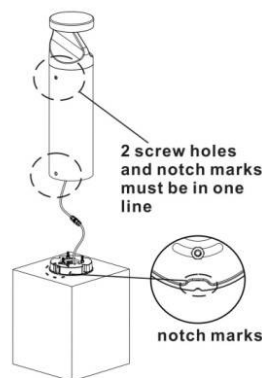


⑨




### PIR sensor detection coverage

The light keeps 100% when presence is detected for 3 minute hold time, then turn off if no presence detected.



PIR sensor



Product Specifications		15W		25W	
Input Voltage		100-277 Vac/120-277 Vac/100-240 Vac/220-240 Vac (Subject to the input voltage on nameplate)			
Power Frequency		50 / 60 Hz			
Outlook Dimensions		Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")	Ø135×500mm (Ø5.31"×19.69")	Ø135×1000mm (Ø5.31"×39.37")
Net Weight		3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)	3.8±0.3kg (8.38±0.66Lbs)	5.4±0.3kg (11.9±0.66Lbs)
Working Temperature	Conventional	-20°C to + 45°C(-4°F to +113°F)			
	With PIR	-20°C to + 40°C(-4°F to +104°F)			
	DALI	-30°C to + 50°C(-22°F to +122°F)			
Storing Temperature		-40°C to + 70°C(-40°F to +158°F)			

### Dimmable

L brown black N blue white GND yellow/green green	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	blue white	or	brown blue	or	black gray	or	red orange
	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	purple gray	or	purple pink	or	purple pink	or	purple pink
	Aux 12Vdc + pink Aux 12Vdc - black/white	or	pink black/white	or	pink black/white	or	pink black/white	or	pink black/white	or	pink black/white
	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	purple pink	or	purple pink	or	purple pink	or	purple pink
L brown black N blue white GND yellow/green green	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	purple gray	or	purple pink	or	purple pink	or	purple pink
	Aux 12Vdc + pink Aux 12Vdc - black/white	or	pink black/white	or	pink black/white	or	pink black/white	or	pink black/white	or	pink black/white
	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	purple pink	or	purple pink	or	purple pink	or	purple pink
	DIM+/DA1 purple DIM-/DA2 gray	or	purple pink	or	purple pink	or	purple pink	or	purple pink	or	purple pink



Warning! do not wire dim cord to high voltage, or dim function will fail.


- For type Y attachments: if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Installation Instructions

Packing List		
	Base plate template	1PC
	Screw fixing plate	1PC
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS



Physical Dimensions(mm/inch)

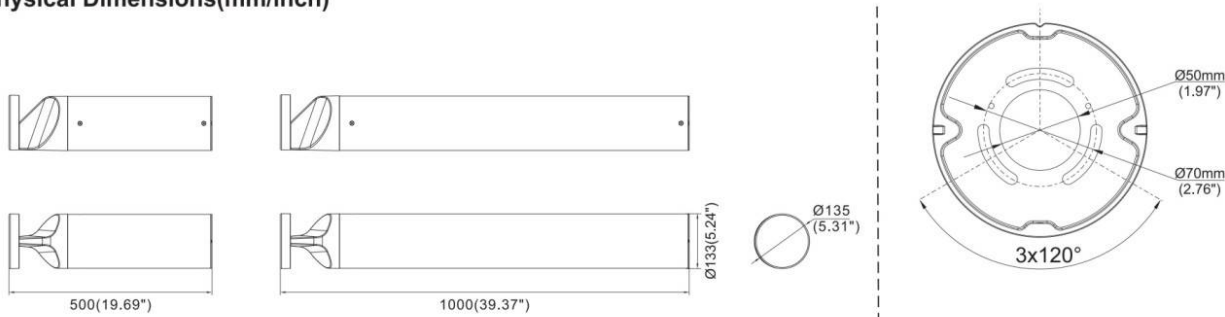

Installation

