

Code article 86.L001.2402.02




Ⅰ .Ceiling Mounted




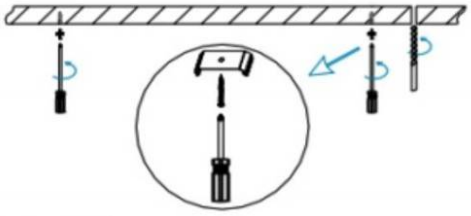

1.Install the setscrews.

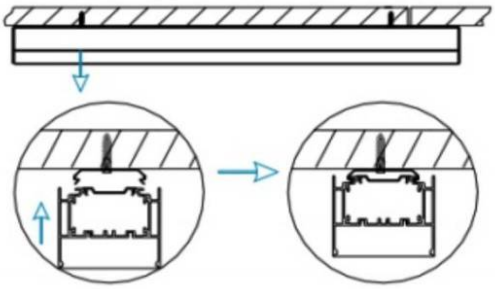

2.Put the snap-fit into the setscrews and lock it tightly.

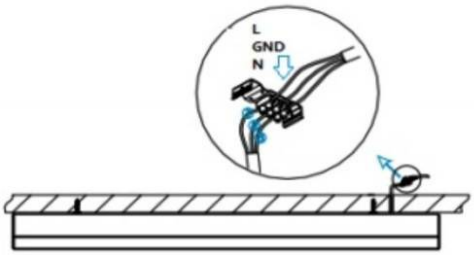


3.Connect the power cable.




4.Adjust the lamp's angle and clean it.

Ⅱ .Suspending




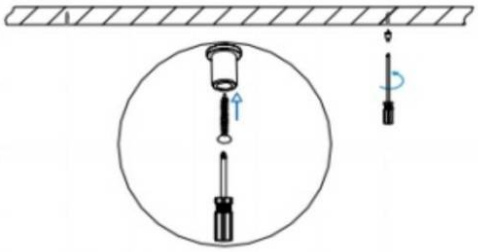

1. Find a suitable position then borehole.

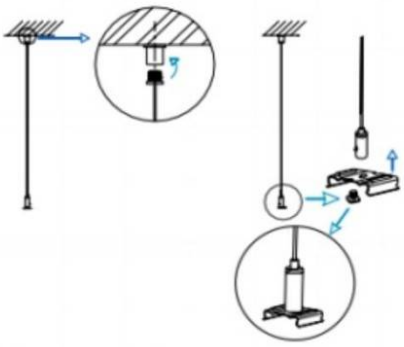

2.Hook mounted.

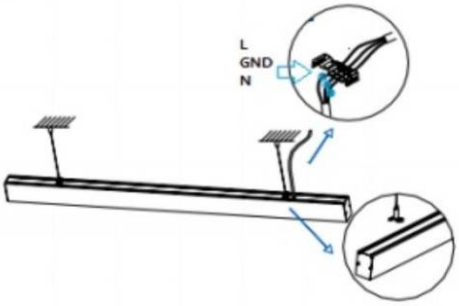

3.Connect the wire by junction box power-off simultaneously.



4.Adjust the position of the fixture and clean it.