



- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

1



The picture is for reference only, the actual product shall prevail!  
Warning: Cut off the power supply before installation to prevent electric shock!

Screw




X4

Screw



X4


2

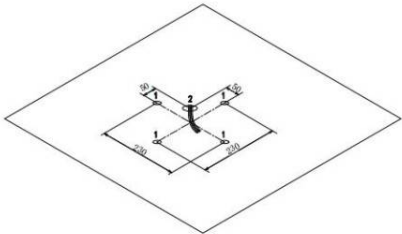

First select the place to be installed, place the ceiling bracket in the mounting position, and mark it with a pen core


Then drill holes for screw A of the corresponding size. If you need to hide the outlet, An AC line control needs to be reserved in the middle of the ceiling

3

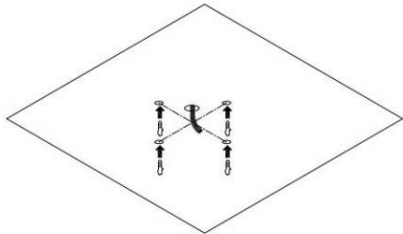


Insert screw A into the hole

4

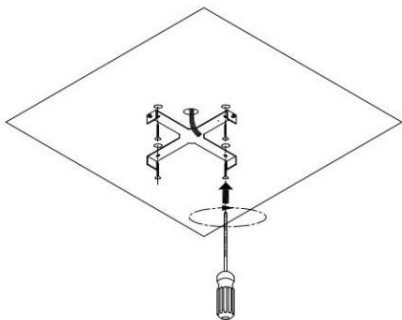

Take out 4 screws B and use a screwdriver to fix the ceiling bracket to the ceiling.


5

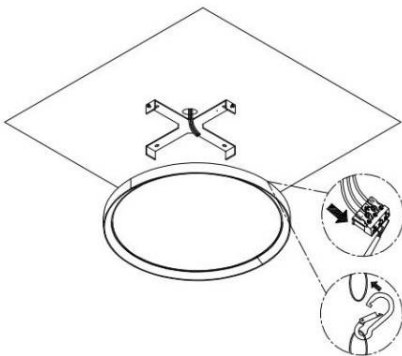

1. Connect the ceiling AC wire to the plate terminal, wiring method: (L-live wire) (N-neutral wire) (-ground wire)


2. Hang up the anti-fall rope

6

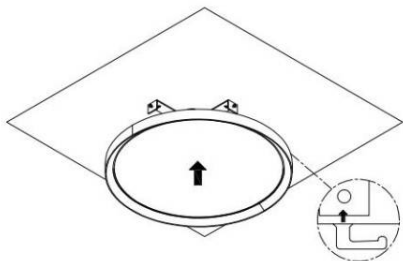


Lift the frame of the lamp and align the four notches with the four installation pillars of the ceiling bracket.

7

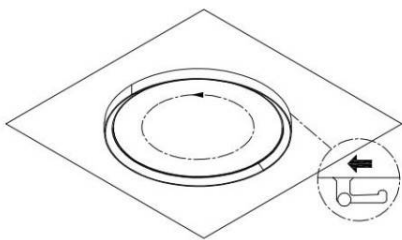


Rotate the frame of the lamp clockwise so that it locks into place with the ceiling bracket.

8

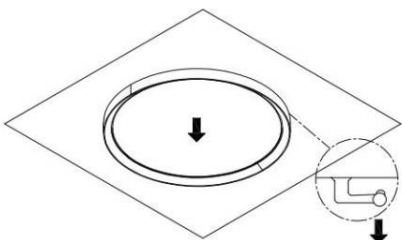

Make sure that the frame of the lamp is securely attached to the ceiling bracket.

9

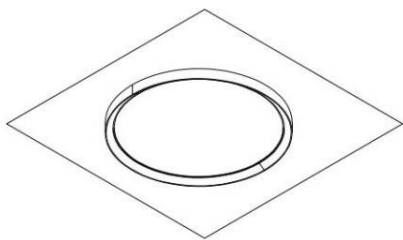

After installation, turn on the power and light up the lamps.