
**Item code 86.A0011.2492.01**



• Installation and wiring of luminaire must be in accordance with all applicable local codes.
• Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
• DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
• DO NOT install damaged product.
• Make sure electrical power is OFF before and during installation and maintenance.
• Make sure the equipment is properly grounded.
• Make sure the supply voltage is same as the rated fixture voltage.


①



The picture is for reference only, the actual product shall prevail!
Warning: Cut off the power supply before installation to prevent electric shock!

| | | |
|---|---|---|
| Screw |  | X4 |
| Screw |  | X4 |


②

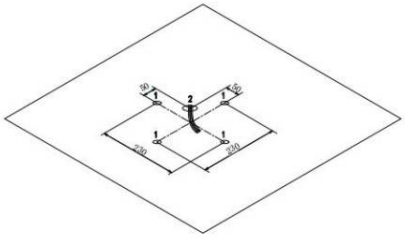

First select the place to be installed,place the ceiling bracket in the mounting position, and mark it with a pen core


Then drill holes for screw A of the corresponding size.If you need to hide the outlet, An AC line control needs to be reserved in the middle of the ceiling

③

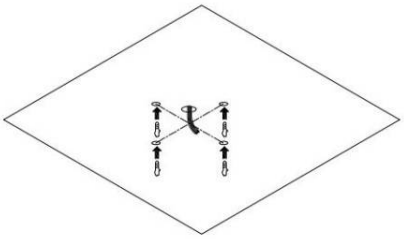


Insert screw A into the hole

④

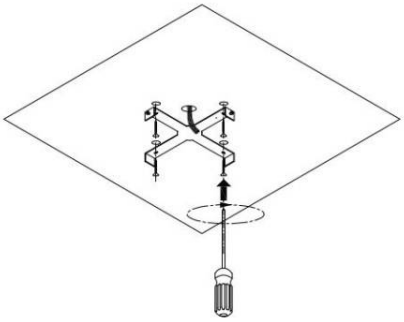

Take out 4 screws B and use a screwdriver to fix the ceiling bracket to the ceiling.


⑤

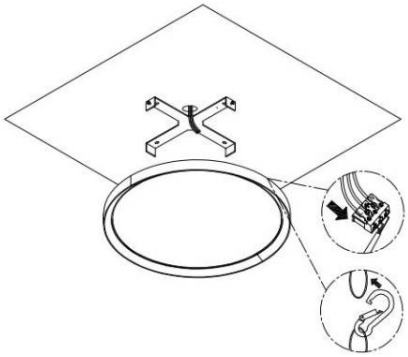

1.Connect the ceiling AC wire to the plate terminal, wiring method: (L-live wire) (N-neutral wire) ( -ground wire)


2.Hang up the anti-fall rope

⑥

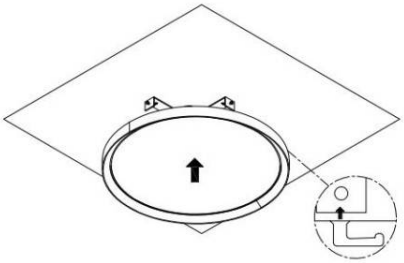


Lift the frame of the lamp and align the four notches with the four installation pillars of the ceiling bracket.

⑦

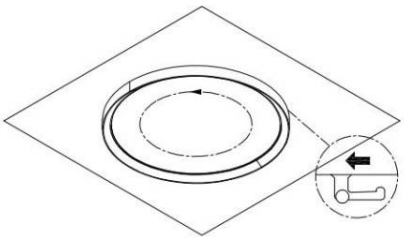


Rotate the frame of the lamp clockwise so that it locks into place with the ceiling bracket.

⑧

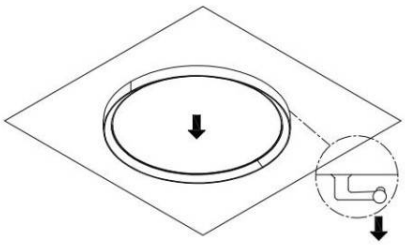

Make sure that the frame of the lamp is securely attached to the ceiling bracket.

⑨

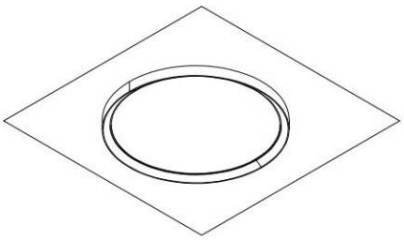

After installation, turn on the power and light up the lamps.