

- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.

### Installation-Profile connection



### Installation-Cover




### Installation-End cap



## Installation-Screws ceiling


**1**

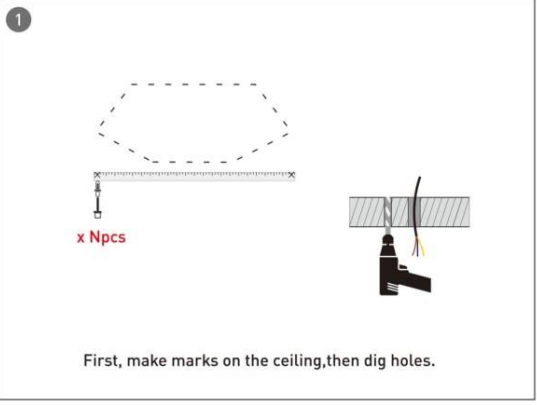

x Npcs

First, make marks on the ceiling, then dig holes.


**2**



The lamp top cover.

**3a**


If the driver is **dimming & external** installation

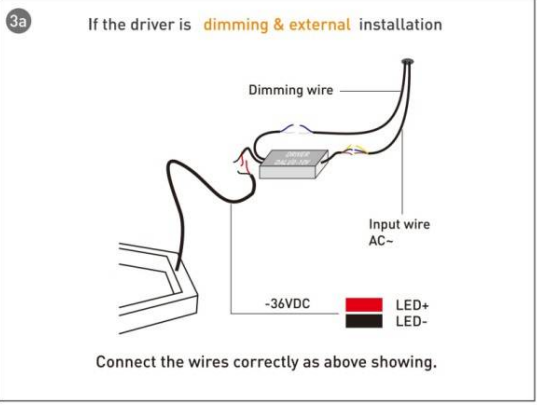

Connect the wires correctly as above showing.


**3b**

If the driver is **non-dimming & external** installation

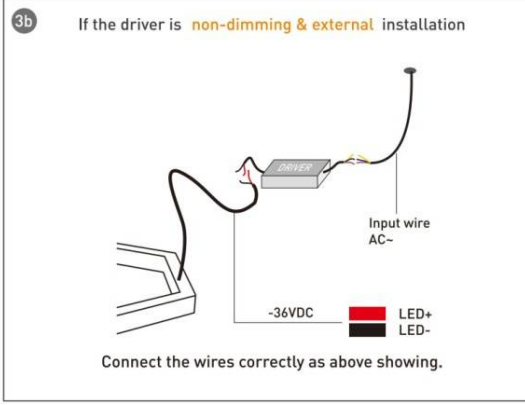


Connect the wires correctly as above showing.

**4**

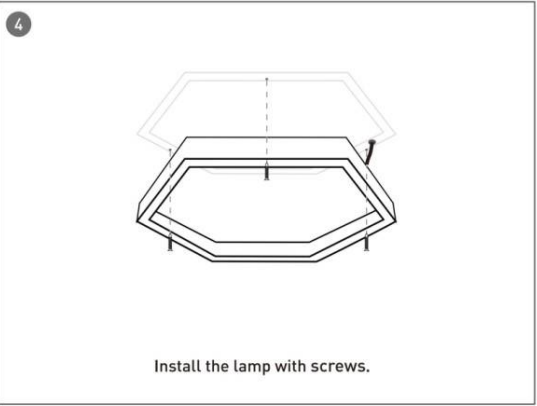


Install the lamp with screws.

**5**

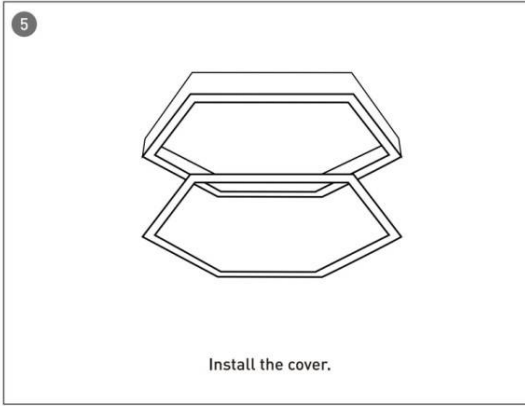


Install the cover.

**6**

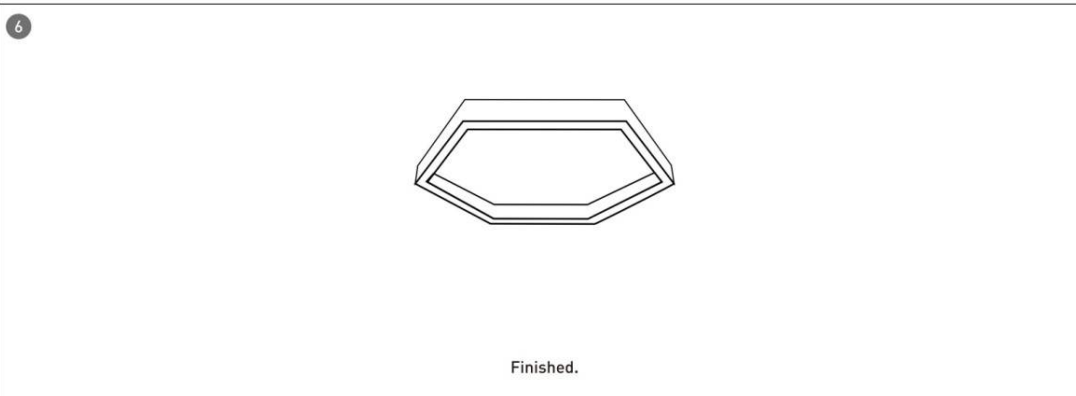


Finished.


## Installation-Pendant with ceiling box

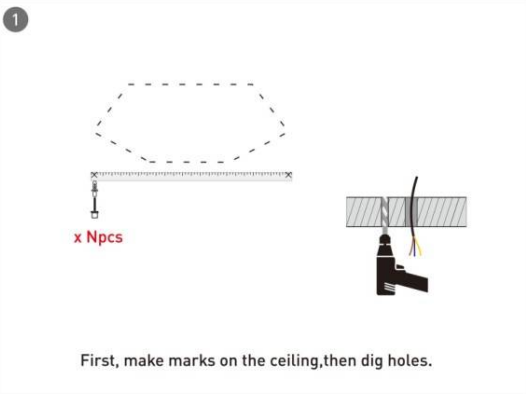1


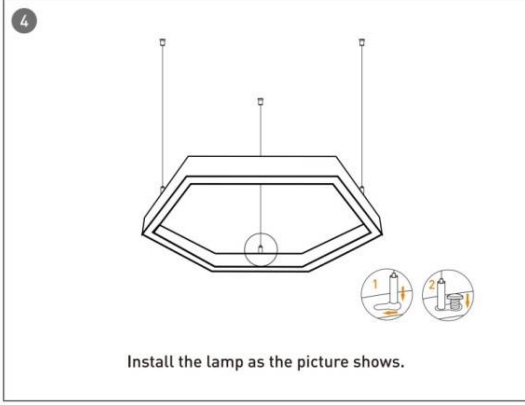
First, make marks on the ceiling, then dig holes.

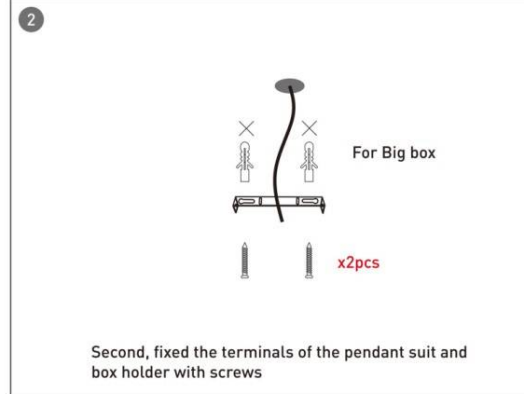2


Second, fixed the terminals of the pendant suit and box holder with screws

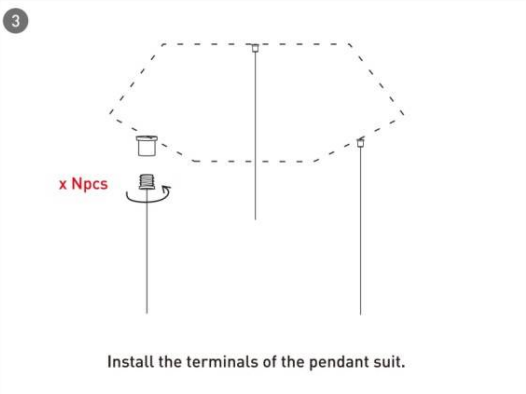3


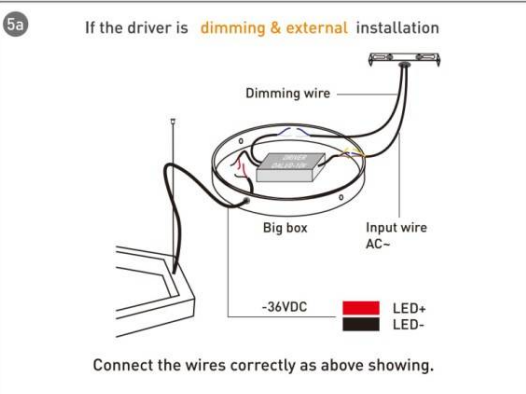
Install the terminals of the pendant suit.

4


Install the lamp as the picture shows.

5a


If the driver is **dimming & external** installation




Connect the wires correctly as above showing.

5b


If the driver is **non-dimming & external** installation

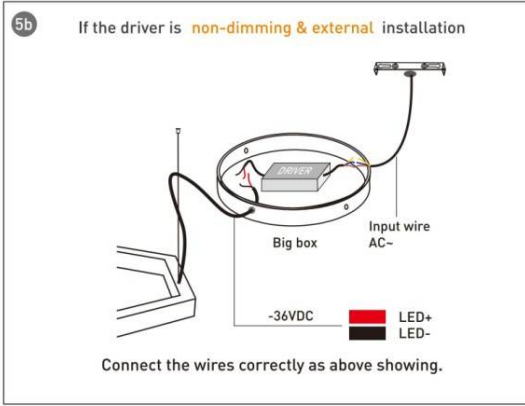

Connect the wires correctly as above showing.

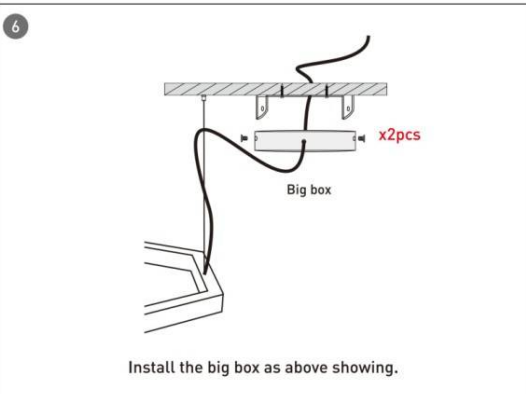6


Install the big box as above showing.

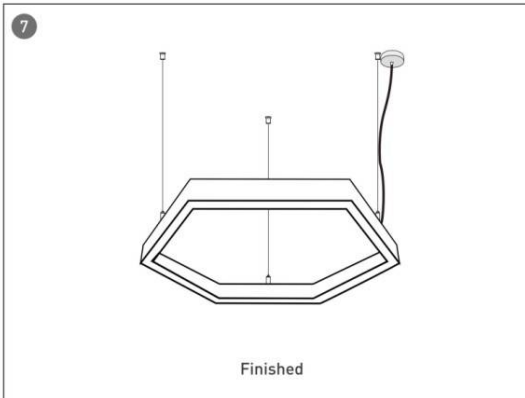7


Finished

### Installation-C Clip ceiling

