





Linear accent tracklight

|              |                          |
|--------------|--------------------------|
| Item code    | 86.TL01.J323.01          |
| Product type | Indoor                   |
| Category     | Tracklights              |
| Family       | Magnetic Track           |
| Subfamily    | Linear accent tracklight |
| Pictograms   |                          |

Scheme

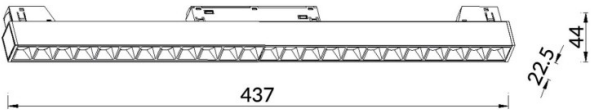

Photometry

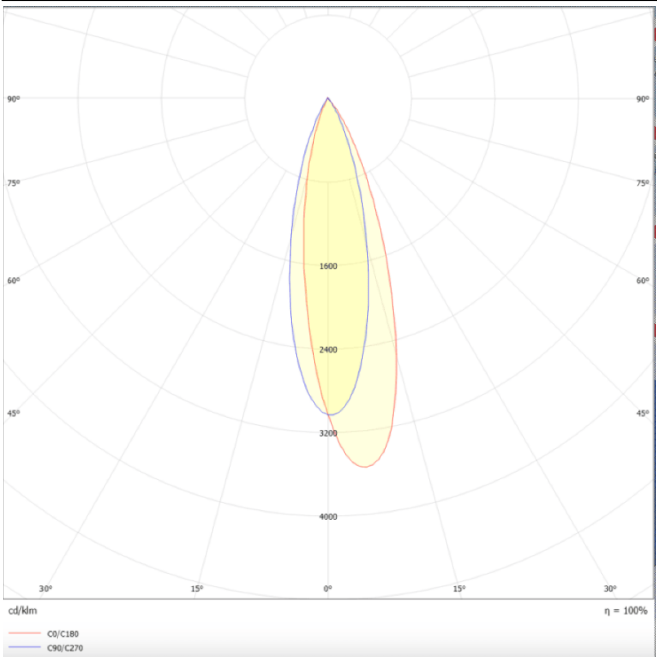

|                            |                                 |
|----------------------------|---------------------------------|
| Product                    |                                 |
| Real power (W)             | 24                              |
| Real luminous flux (Lm)    | 2400lm                          |
| Luminous efficiency (Lm/W) | 100                             |
| Beam angle (°)             | 24°                             |
| Chip Brand                 | OARAM                           |
| Control gear               | DALI Brightness Dim<br>0.1~100% |
| Average life time (h)      | 50000hrs L80 B10                |
| Colour temperature (K)     | 3000                            |
| Colour consistency (SDCM)  | SDCM<3                          |
| CRI                        | 90                              |