



- Installation and wiring of luminaire must be in accordance with all applicable local codes.
- Installation, inspection, and maintenance of luminaires should be performed by a qualified electrician.
- DO NOT make or alter any open holes in the luminaire. Do not modify the luminaire.
- DO NOT install damaged product.
- Make sure electrical power is OFF before and during installation and maintenance.
- Make sure the equipment is properly grounded.
- Make sure the supply voltage is same as the rated fixture voltage.


Installation Steps

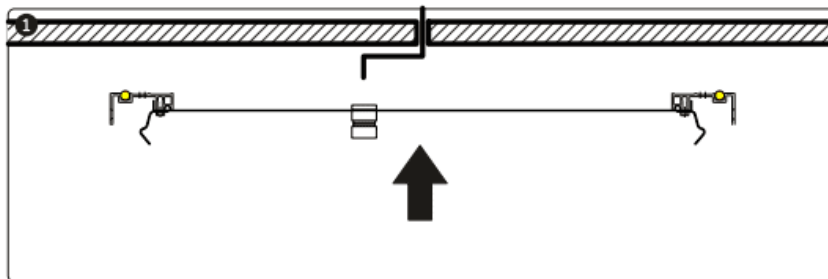


Fixing the ceiling mounted back-plate to the ceiling.

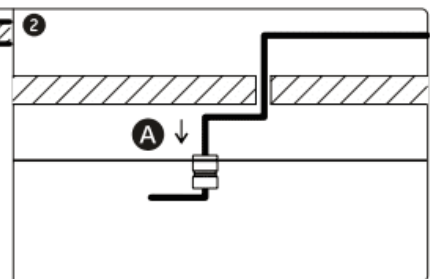


Pass the AC cable through the waterproof connector and tighten it to prevent water.

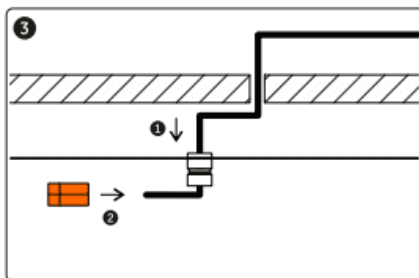


Plug in AC terminal. Insert cable.

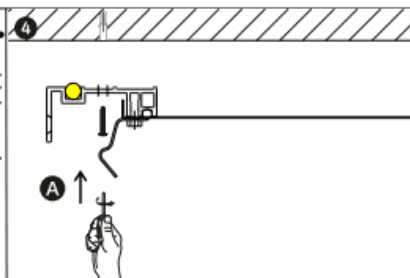

Install the ceiling bracket to the ceiling. And according to the size of the lamp.

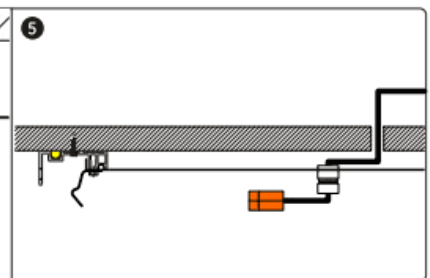


Complete the installation of the ceiling tray.

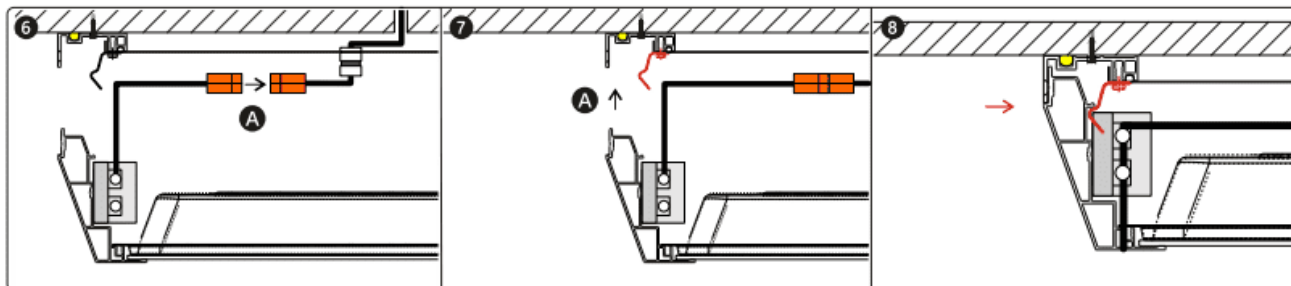


Plug the of AC terminals to driver.

Lift the fixture up and insert it into the ceiling plate.

The stainless steel clips on the ceiling plate hangs back on the light body.

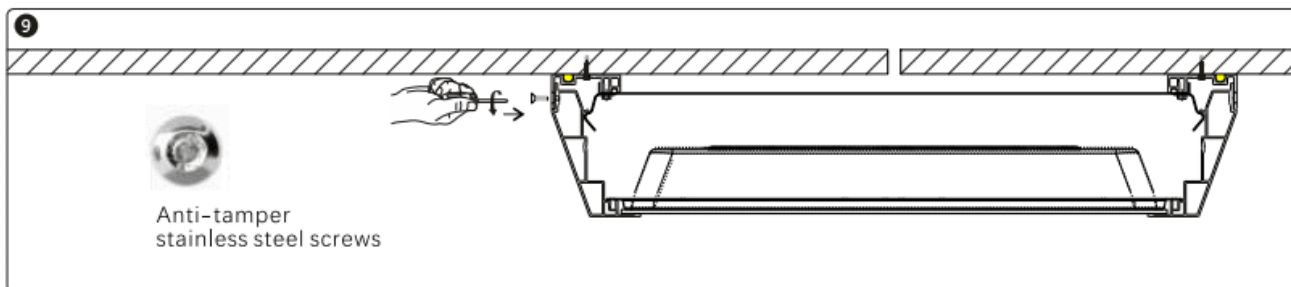

Lock the tamper proof screws, through the ceiling plate, into the light body. Achieve fixing and sealing.

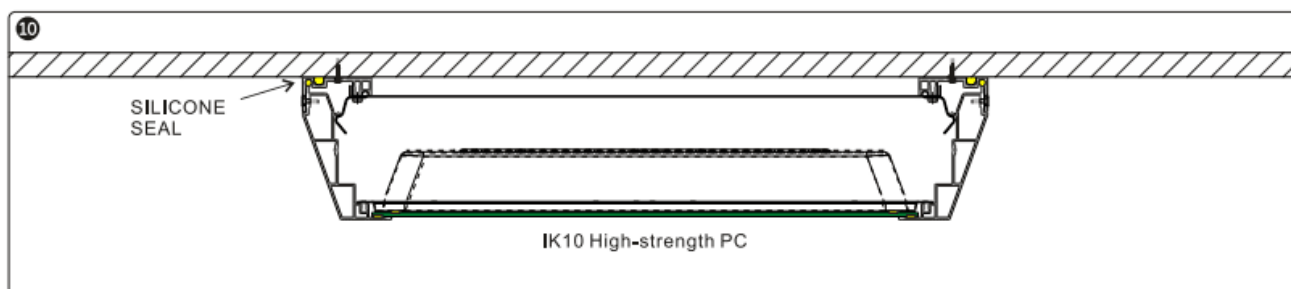

Completing the installation, the yellow part is a silicone sealing ring, resulting in a completely seamless exterior to IP65 and an IK10 rating with a high-strength PC diffuser.