

Length	Size A(mm)	Size B(mm)/Size C(mm)
600mm	620mm	75
1200mm	1152mm	75
1500mm	1452mm	75

Wiring Method:

- Single wired




- Linkable ( Double wired )



How many LED fixtures we could connect on one line


	Input Voltage	Max Qty
1.5mm <sup>2</sup>	230VAC/20W	54
	230VAC/35W	36
	230VAC/50W	27

take out old cap then install the waterproof end cap




Ceiling mounted:


Make a right position and screw hole on Ceiling  
Fix the clip into ceiling



Install the lamp into the clips.




Fixed the light




Suspension with steel cable:

Make a right position and fix the clip




Install the lamp into the clips.  
Install the hook and close the installation buckle.  
Then adjust the length of suspension kits.




Connecting Power Supply:

• Single wired

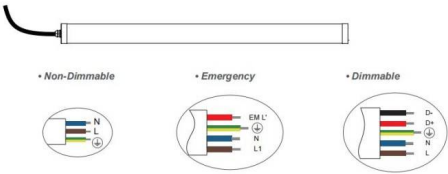


Connecting Power Supply:


• Linkable ( Double wired )

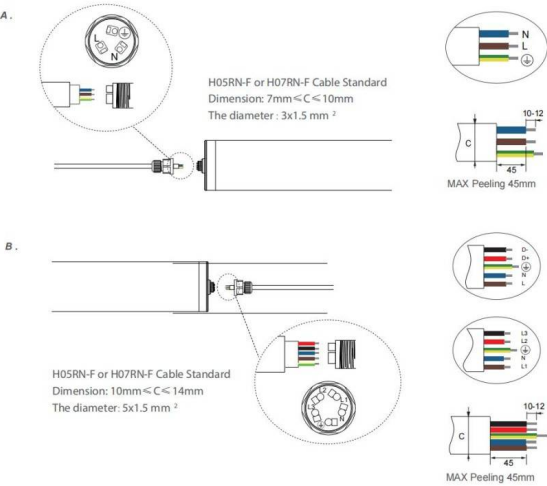

Accessory:

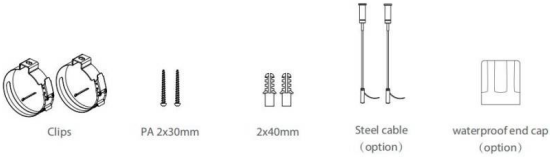

Tools:

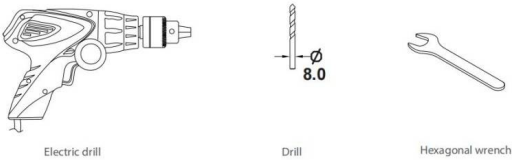

**⚠ Safety notes:**

*The installation and connection of the luminaire must be done when power switched off and by qualified people.*

*Make sure no electrical power during installation.*

*Max current should not exceed 16A in one power feed in circuit.*

*The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.*

**D** This product contains a light source of energy efficiency class D.