SPIKE SPOT LIGHT - TUBEO-R **Item code 86.OS04.1341.02**



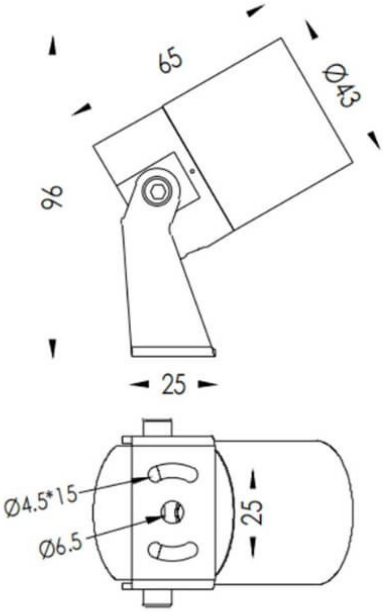
TUBEO-R

Lavov spike spot light from the family TUBEO-R with a power of 4W and a 36 degrees beam angle. With a total lumen output of 340lm and a luminous efficiency of 85lm/W. Made in Die Cast Aluminum body, steel bracket and Tempered Glass cover and finished in Black colour. IP67 and IK10 degree of protection ON-OFF driver.

Item code	**86.OS04.1341.02**
Product type	**Outdoor**
Category	**Spike Spot Light**
Family	**TUBEO-R**
Subfamily	**TUBEO-R**
Pictograms	

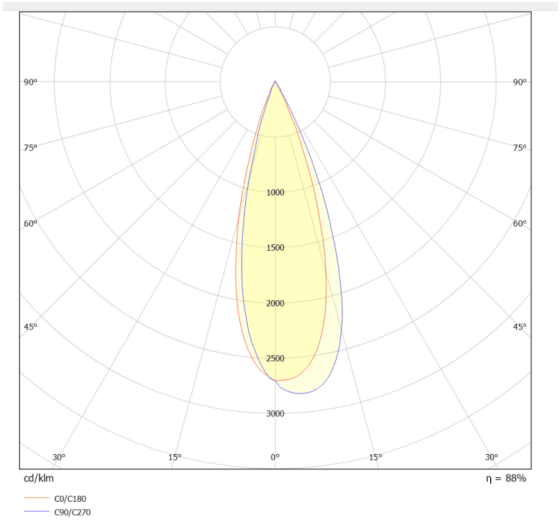
Dimensions	
Product dimensions (mm)	**43(Dia)X65(H)mm**

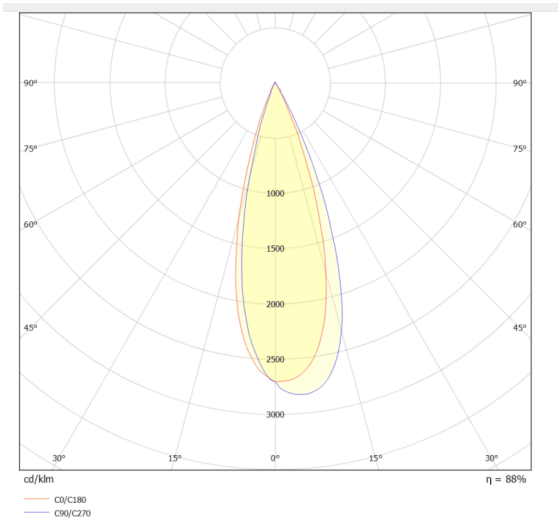
Scheme

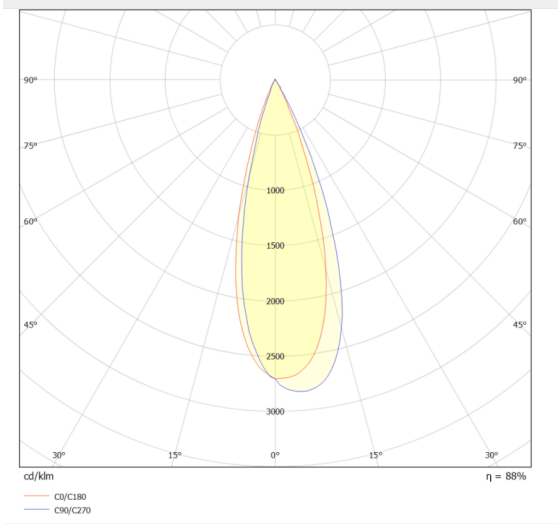


Product	
Real power (W)	**4**
Real luminous flux (Lm)	**340**
Luminous efficiency (Lm/W)	**85**
Beam angle (º)	**36**
Life time (h)	**50000h L70B10**
IP	**67**
Electrical class insulation	**Class II**
Colour	**Black**
Control gear included	**Yes**
Control gear	**ON-OFF**
Light source	**LED**
Type of LED	**1x4W CREE 1304**
Average life time (h)	**50000h L70B10**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK10**

Photometry


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270


90°
75°
60°
45°
1000
1500
2000
2500
3000
30°
15°
0°
cd/klm
η = 88%
C0/C180
C90/C270