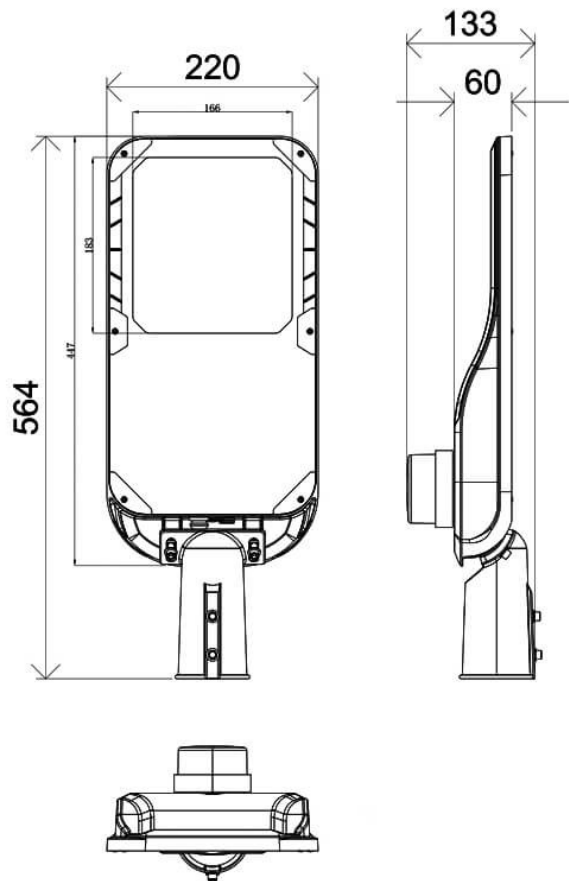




Dimensions











Product dimensions (mm) **220x565x85mm**

Scheme



Vialight II

Lavov Street light from the family Vialight II with a power of 90W and an optics T2 (150°X75°) degrees . CCT 4000K. With a total lumen output of 13500lm and a luminous efficiency of 150lm/W.DALI driver. Made in die cast aluminum and finished in Grey color. IP65 and IK IK08 degree of protection.

Item code	86.OS11.5473.03
Product type	Outdoor
Category	Street lights
Family	Vialight II
Pictograms	<div><div> 220 240 V</div><div> 850°</div><div> Driver INCL.</div><div></div><div></div><div> IP 65</div><div> CRI 70</div><div> SDCM 5</div><div> 50000h L70B10</div><div> IK 08</div></div>

Product	
Real power (W)	90
Real luminous flux (Lm)	13500
Luminous efficiency (Lm/W)	150
Beam angle (°)	T2 (150°X75°)
Life time (h)	50000h L70B10
IP	65
Electrical class insulation	Class I
Colour	Grey
Control gear included	Yes
Control gear	DALI
Light source	LED
Type of LED	Sanan / SMD3030
Average life time (h)	Up to 100,000hrs LM70,Ta 25°C
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<6
CRI	≥70
IK	IK08