



### UP&DOWNT

UP&DOWNT is a wall light with round design emitting light up and down. With a size of Ø60mmx180mm has a power of 2x4,5W and two reflectors up&down of 15 degrees beam angle. With a real lumen output of 508lm, and an efficiency of 56.44lm/W. Is made in Die Cast Aluminium Body, Tempered Glass Cover and has an IP65 and an IK10 degree of protection. ON-OFF driver. Finished in Grey color.

<b>Item code</b>	<b>86.OW09.1311.03</b>
------------------	------------------------

<b>Product type</b>	<b>Outdoor</b>
---------------------	----------------

<b>Category</b>	<b>Wall Light</b>
-----------------	-------------------

<b>Family</b>	<b>UP&amp;DOWNT</b>
---------------	---------------------

<b>Pictograms</b>	
-------------------	--



<b>Product</b>	
----------------	--

<b>Real power (W)</b>	<b>4.5</b>
-----------------------	------------

<b>Real luminous flux (Lm)</b>	<b>508</b>
--------------------------------	------------

<b>Luminous efficiency (Lm/W)</b>	<b>56.44</b>
-----------------------------------	--------------

<b>Beam angle (°)</b>	<b>15</b>
-----------------------	-----------

<b>Life time (h)</b>	<b>50000h L70B10</b>
----------------------	----------------------

<b>IP</b>	<b>65</b>
-----------	-----------

<b>Electrical class insulation</b>	<b>Class I</b>
------------------------------------	----------------

<b>Colour</b>	<b>Grey</b>
---------------	-------------

<b>Chip Brand</b>	<b>NICHIA</b>
-------------------	---------------

<b>Control gear included</b>	<b>Yes</b>
------------------------------	------------

<b>Control gear</b>	<b>ON-OFF</b>
---------------------	---------------


<b>Colour temperature (K)</b>	<b>3000</b>
-------------------------------	-------------

<b>Colour consistency (SDCM)</b>	<b>SDCM&lt;3</b>
----------------------------------	------------------

<b>CRI</b>	<b>80</b>
------------	-----------

<b>IK</b>	<b>IK10</b>
-----------	-------------

### Scheme

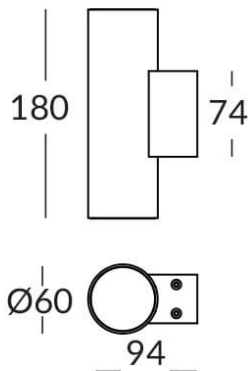

### Photometry

