


MARC

Lavov surface mounted luminaire from the family MARC with a power of 40W and a beam angle of 110 degrees . UGR<22. Finished in white colour. With a total lumen output of 5000lm and a luminous efficacy of 125lm/W. Made in Aluminum structure powder painted . Driver On-Off. CCT 6000K. Dimensions 639x639x70mm.Class II isoltationElectrical feeding: 220/240V.


Item code	**86.SM01.1641.01**
Product type	**Indoor**
Category	**Surface mounted Fixtures**
Family	**MARC**
Pictograms	

Dimensions	
Product dimensions (mm)	**639x639x70mm**

Scheme

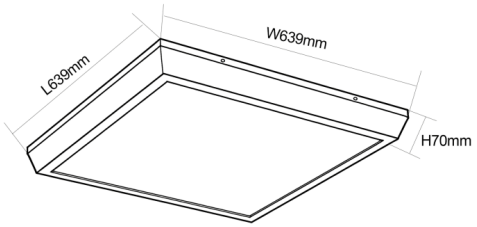

Photometry

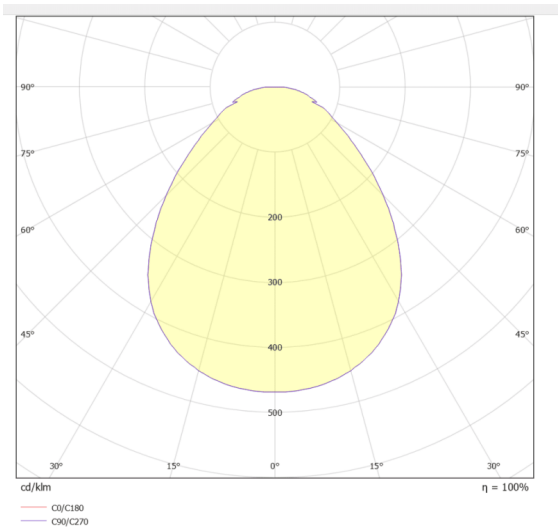

Product	
Real power (W)	**40**
Real luminous flux (Lm)	**5000**
Luminous efficiency (Lm/W)	**125**
Beam angle (º)	**110**
Life time (h)	**50000h L90B10**
IP	**65**
Electrical class insulation	**Class II**
Electrical feeding	**220/240V**
Colour	**white**
U. G. R	**22**
Chip Brand	**Sanan**
Control gear included	**Yes**
Control gear	**On-Off**
Power Factor	**0.95**
Flicker Free	**yes**
Light source	**LED**
Type of LED	**SMD 2835**
Colour temperature (K)	**6000**
Colour consistency (SDCM)	**SDCM4**
CRI	**80**
IK	**10**