


## Photometry

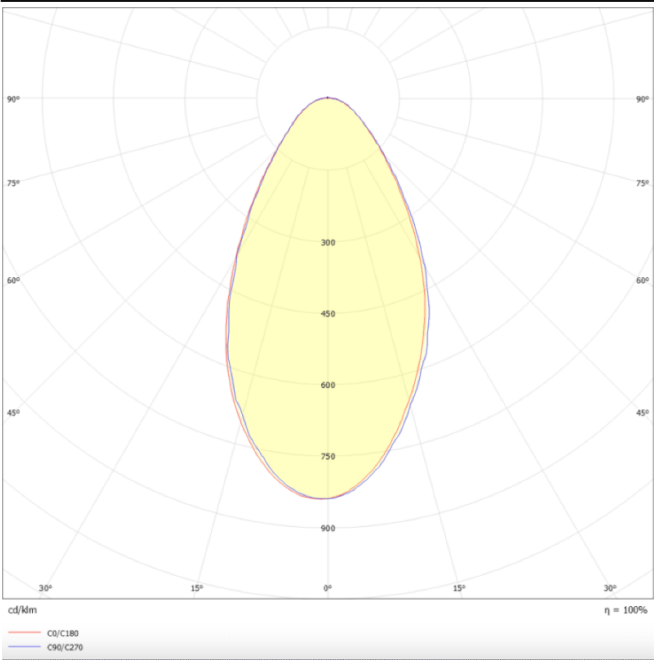

BEAM MODULES

|              |  |
|--------------|--|
| Item code    | 86.OS01.3351.03  |
| Product type | Outdoor  |
| Category     | Spike Spot Light   |
| Family       | BEAM   |
| Subfamily    | BEAM MODULES   |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div></div><div>850°</div><div>CRI<br/>80</div><div>SDCM<br/>3</div></div> <div><div></div><div>Driver<br/>INCL.</div><div>On<br/>Off</div><div></div><div></div></div> <div><div>50000h<br/>L70B10</div><div>IP<br/>65</div><div></div><div>335°</div><div></div><div>90°</div><div>IK<br/>05</div></div> |

|                            |                  |
|----------------------------|------------------|
| Product                    |                  |
| Real power (W)             | 36               |
| Real luminous flux (Lm)    | 2450             |
| Luminous efficiency (Lm/W) | 68.0555555555556 |
| Beam angle (°)             | 60               |
| Life time (h)              | 50000h L70B10    |
| IP                         | 66               |
| Chip Brand                 | Osram            |
| Control gear               | ON-OFF           |
| Average life time (h)      | 50000h L70B10    |
| Colour temperature (K)     | 3000             |
| Colour consistency (SDCM)  | SDCM<3           |
| CRI                        | 80               |
| IK                         | IK08             |