




Scheme



Photometry

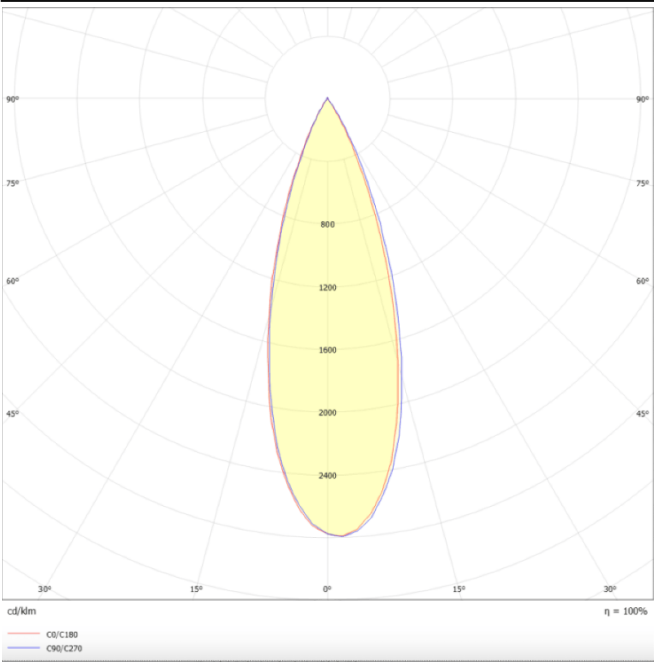

PRO-DR

Lavov downlight from the family PRO-DR with a power of 28,7W and an optics 36 degrees . CCT 4000K. With a total lumen output of 2336lm and a luminous efficiency of 81,4lm/W.DALI driver.

Made in die cast aluminum and finished in Black color.

| | |
|--------------|---|
| Item code | 86.D025.3433.02 |
| Product type | Indoor |
| Category | Downlights |
| Family | PRO-D |
| Subfamily | PRO-DR |
| Pictograms | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |

| | |
|-----------------------------|--------------------|
| Product | |
| Real power (W) | 28.7 |
| Real luminous flux (Lm) | 2336 |
| Luminous efficiency (Lm/W) | 81.400000000000006 |
| Beam angle (°) | 36 |
| Life time (h) | 50000 h L80B10 |
| IP | 20 |
| Electrical class insulation | Clas II |
| Colour | Black |
| Control gear included | Yes |
| Control gear | DALI |
| Flicker Free | Yes |
| Light source | LED |
| Type of LED | COB |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 90 |